

BENEFITS

DESIGNED FOR 35 TO 60 TONS CARRIERS

> HEAVY LOAD AND STRONG GRIP

LOADING, DISMANTLING, CLEANING AND SORTING, DEMOLITION

- **Standard 360° continuous rotation:** full maneuverability to reach optimal and accurate positioning on all jobsites.
- **Secured equipment:** operations are kept safe with overload protection, ending position limiter and dampener.
- **Built to last:** every component in contact with the material is made of reinforced steel: structure and shells of 400HB steel, and blades of 500HB steel.
- **Easy maintenance:** reversible (twice) and field-replaceable lower blades for longer cycles and extended wear resistance..

DEMOLITION & SORTING GRAPPLE MULTIPURPOSE GRIP


ATTACHMENT SPECS		
WEIGHT - WITHOUT ADAPTER PLATE (KG - LB)	3,000	6,614
LOAD CAPACITY (M3 - FT3)	1.5	53
CLOSING FORCE (T)	9.1	

HYDRAULIC SPECS		
OIL FLOW (MAX, L/MIN – GPM)	170	44.9
OPENING & CLOSING PRESSURE (MAX, BAR - PSI)	350	5,075
ROTATION FLOW (MAX, L/MIN – GPM)	45	11.9
ROTATION PRESSURE (MAX, BAR - PSI)	130	1,885

CARRIER SPECS	
WEIGHT (MIN - MAX, T)	35 - 60

DIMENSIONS (MM - IN)		
A	2,511	98.9
В	1,434	56.5
C	1,692	66.6
D	1,944	76.5
E	1,730	68.1
F	1,007	39.6

PRODUCT NUMBER
contact us
contact us
contact us

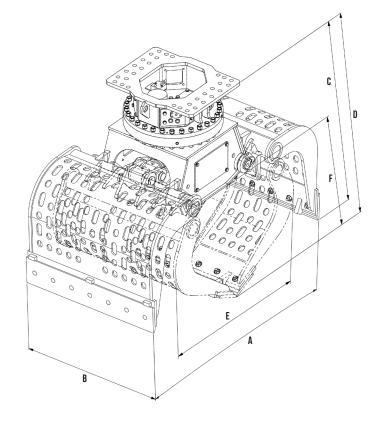



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2024 Montabert. All rights reserved.

