
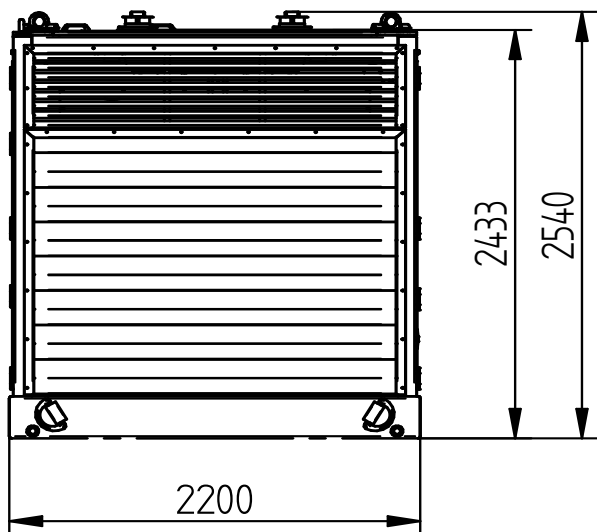
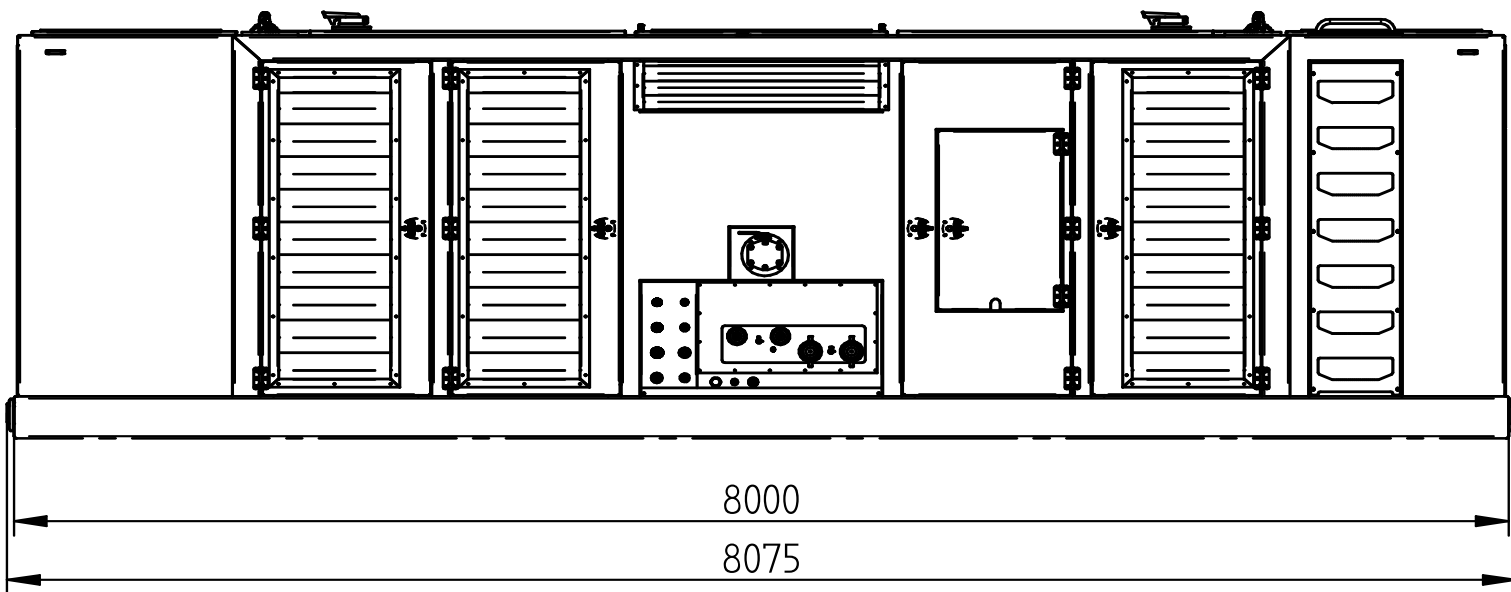


Specification sheet

ICE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

English

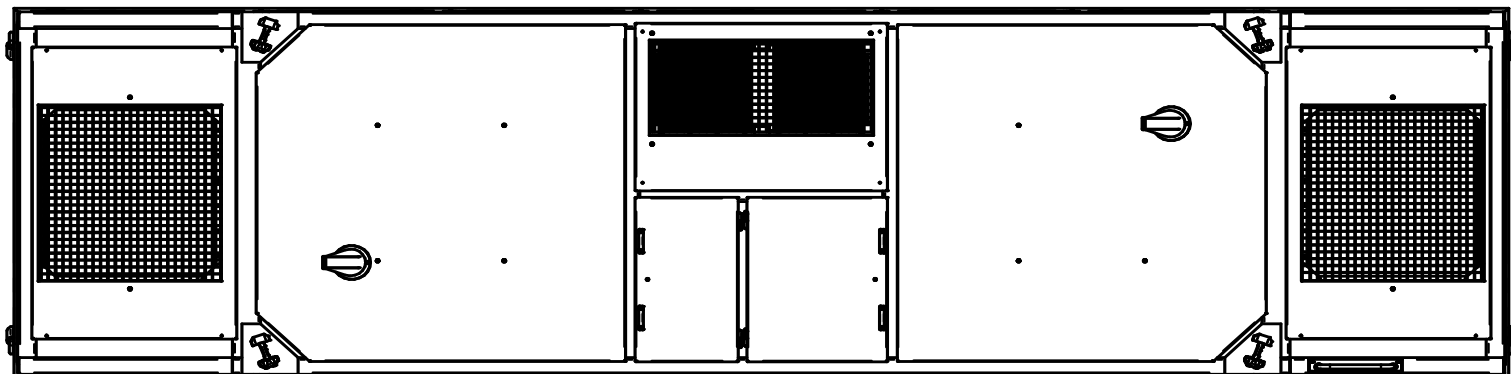

Specifications :

ICE 1600 STAGE V / TIER 4F




Diesel Engine	Volvo Penta TWD 1683 VE (2x)	
Max. theoretical power	1170/1592	kW/HP
Max. frequency	1900	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	1620	L/min
Diesel oil	2200	L
DEF (AdBlue) capacity	140	L
Hydraulic oil	3100	L
Weight without fuel	16080	kg
Weight filled up	18000	kg

Technische Daten

ICE 1600 STAGE V / TIER 4F

Aggregat

Deutsch

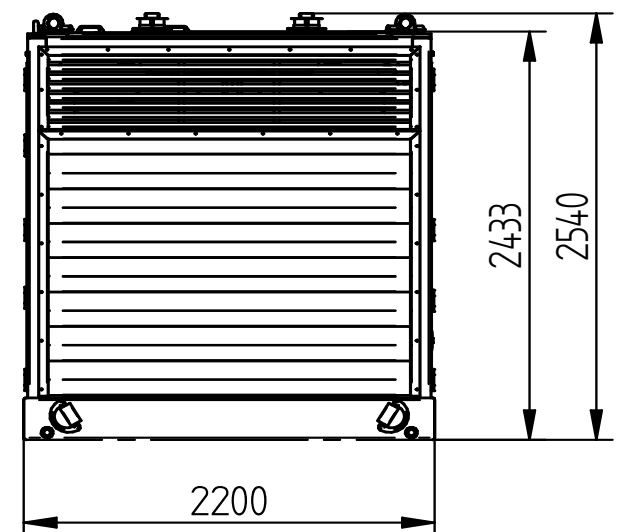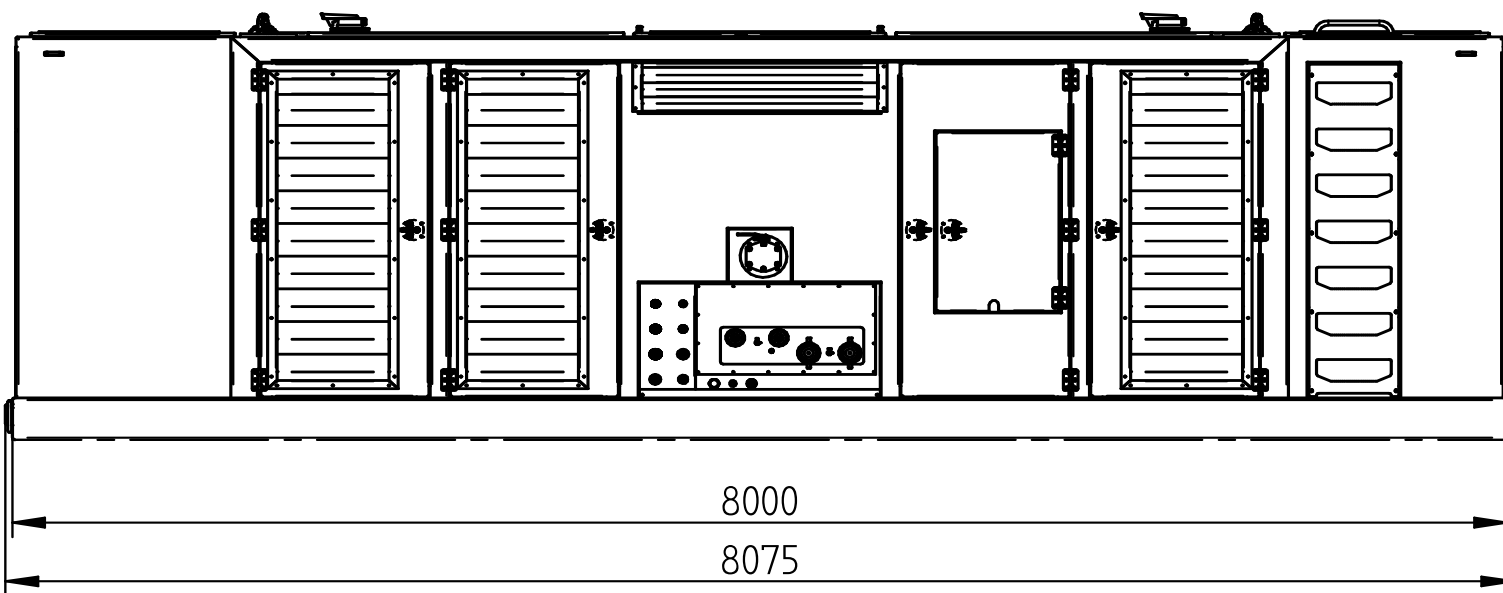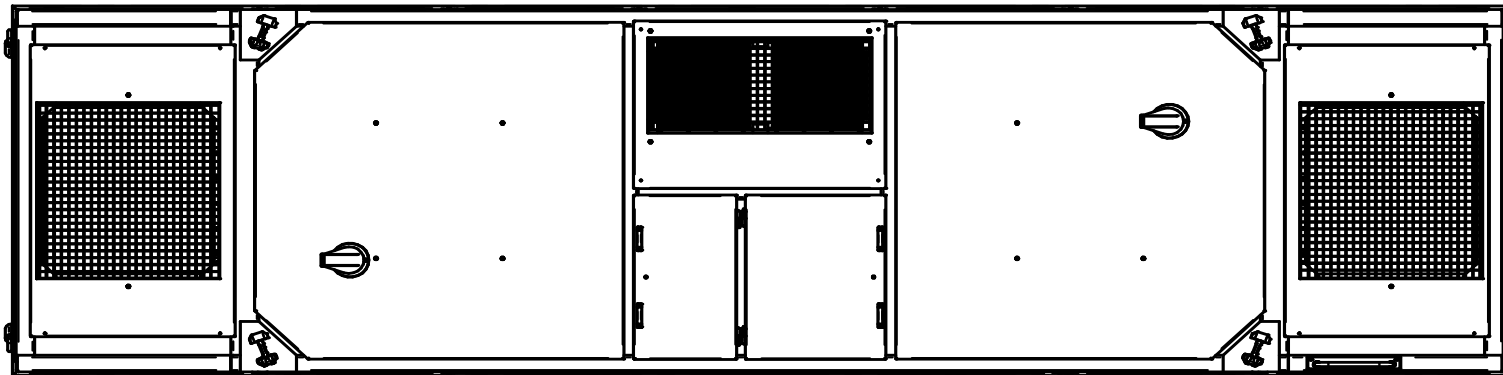




Technische Daten :		ICE 1600 STAGE V / TIER 4F	
Dieselmotor	Volvo Penta TWD 1683 VE (2x)		
Max. theoretische Leistung	1170/1592		kW/HP
Max. Drehzahl	1900		rpm
Max. Betriebsdruck	350		bar
Hydraulische Pumpe	Parker		
Max. Fördermenge	1620		L/min
Diesel Öl	2200		L
DAF (AdBlue) kapazität	140		L
Hydraulische Öl	3100		L
Gewicht ohne Diesel Öl	16080		kg
Gewicht	18000		kg

Spécifications

ICE 1600 STAGE V / TIER 4F

Groupe hydraulique

Français

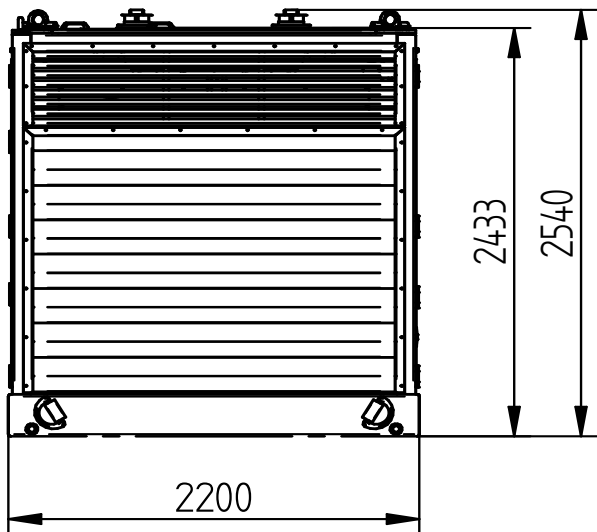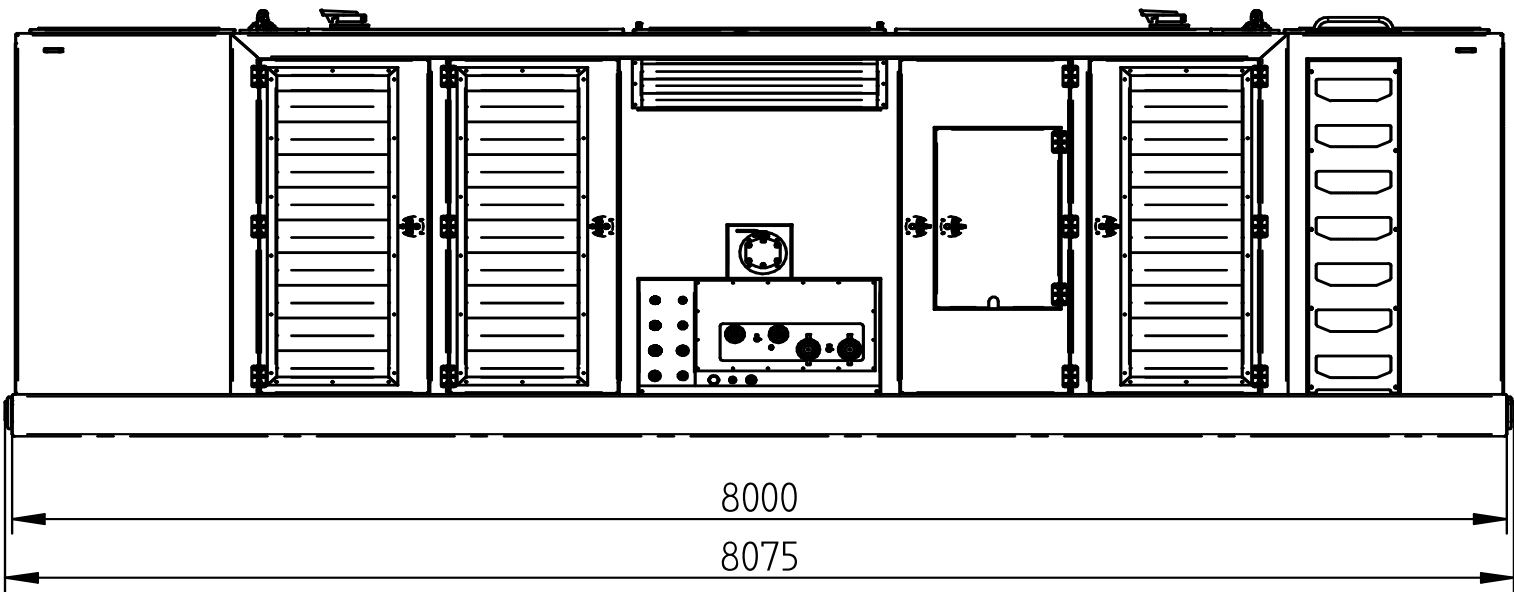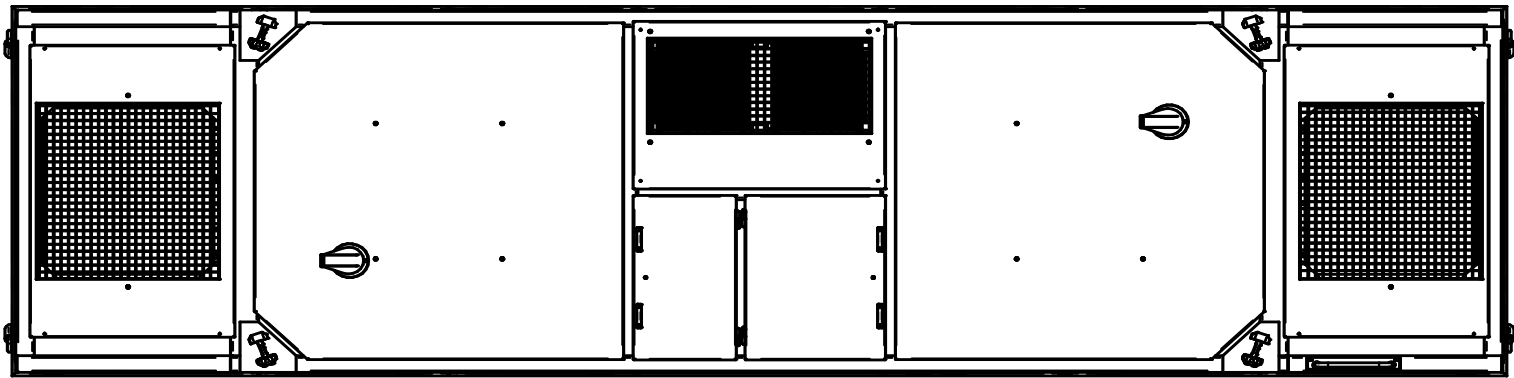




Spécifications		ICE 1600 STAGE V / TIER 4F	
Moteur Diesel	Volvo Penta TWD 1683 VE (2x)		
Puissance théorique max.	1170/1592		kW/HP
Max. fréquence	1900		rpm
Pression de travail max.	350		bar
Pompe hydraulique	Parker		
Débit d'huile max.	1620		L/min
Huile diesel	2200		L
Capacité FED (AdBlue)	140		L
Huile hydraulique	3100		L
Poids sans huile diesel	16080		kg
Poids	18000		kg

Specificaties

ICE 1600 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

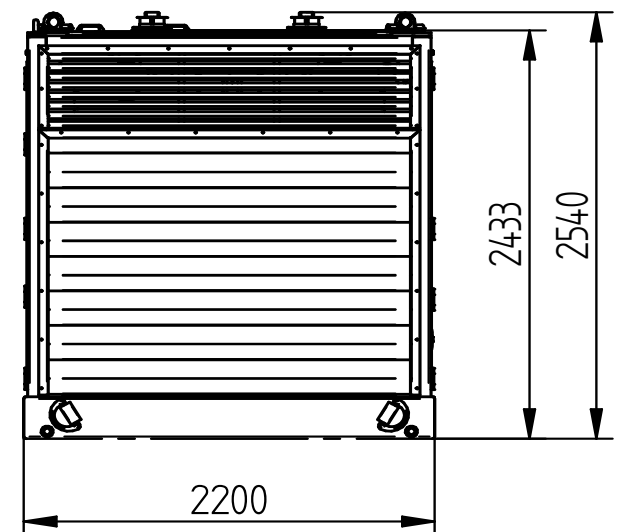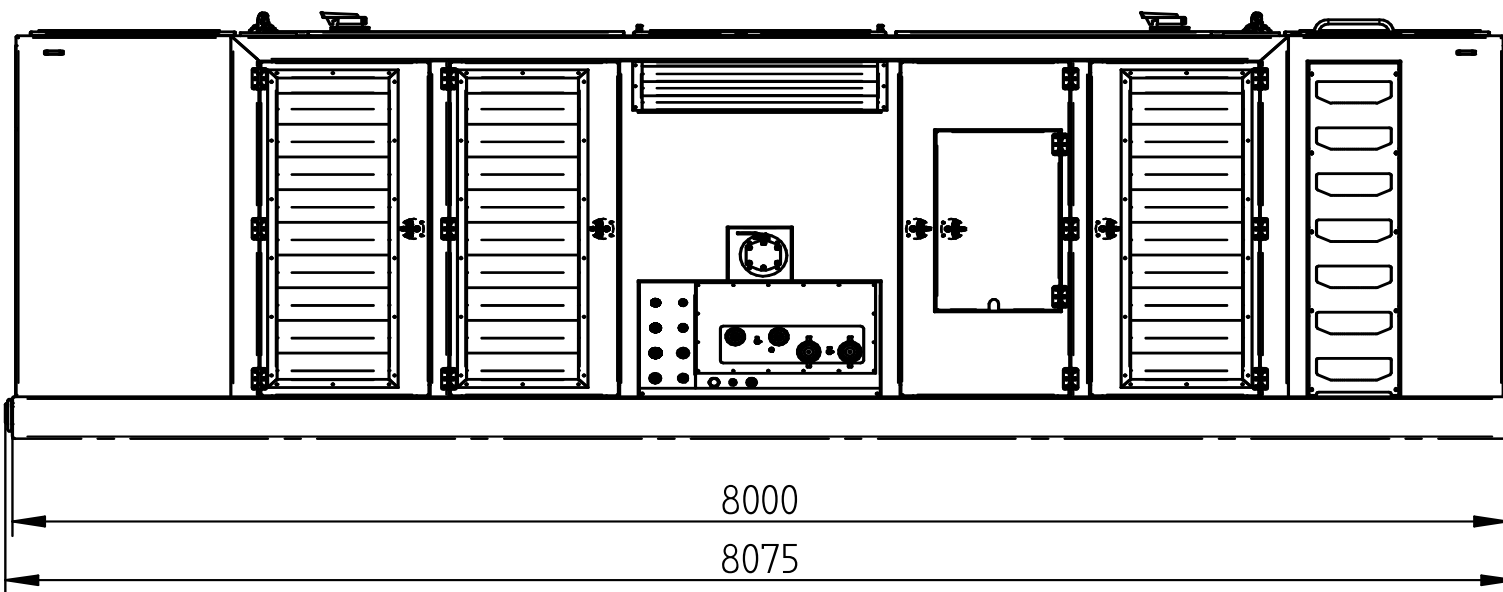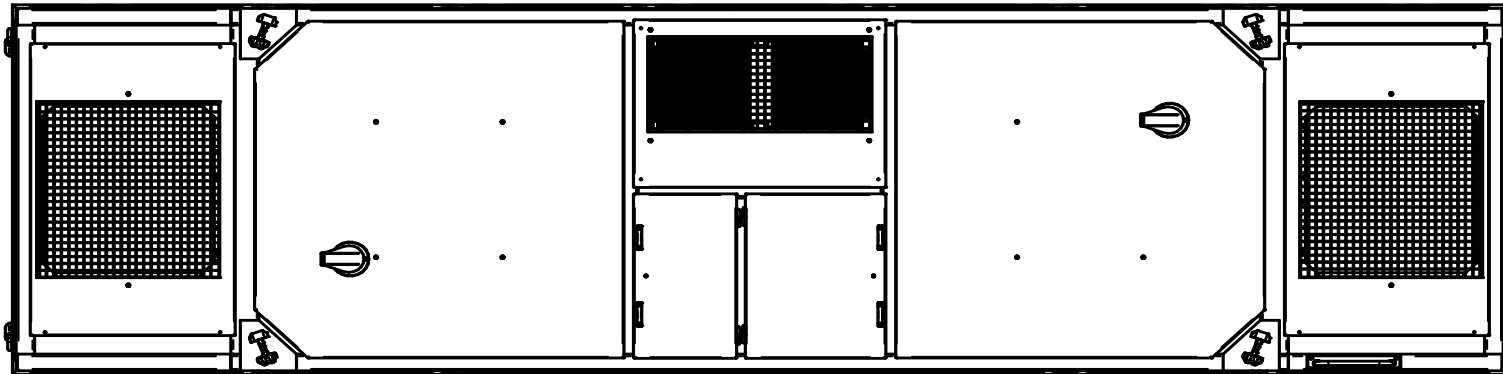




Specificaties ICE 1600 STAGE V / TIER 4F		
Dieselmotor	Volvo Penta TWD 1683 VE (2x)	
Max. theoretisch vermogen	1170/1592	kW/HP
Max. toerental	1900	rpm
Max. werkdruk	350	bar
Hydraulische pomp	Parker	
Max. olie doorstroming	1620	L/min
Diesel olie	2200	L
DEF (AdBlue) capaciteit	140	L
Hydraulische olie	3100	L
Gewicht zonder diesel	16080	kg
Gewicht	18000	kg

Especificaciones

ICE 1600 STAGE V / TIER 4F

Unidat de potencia

Español

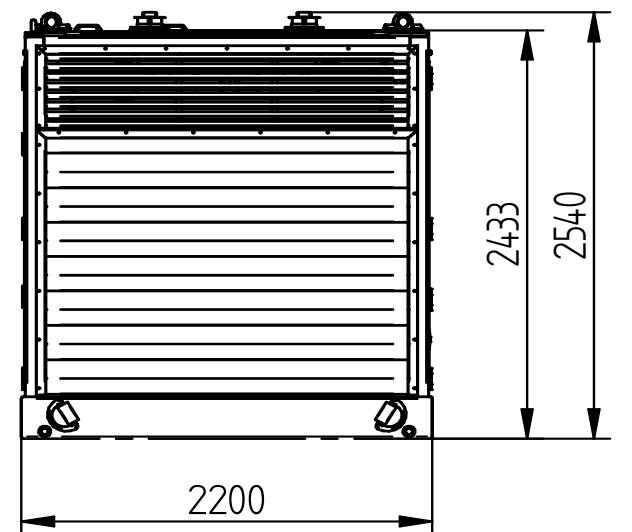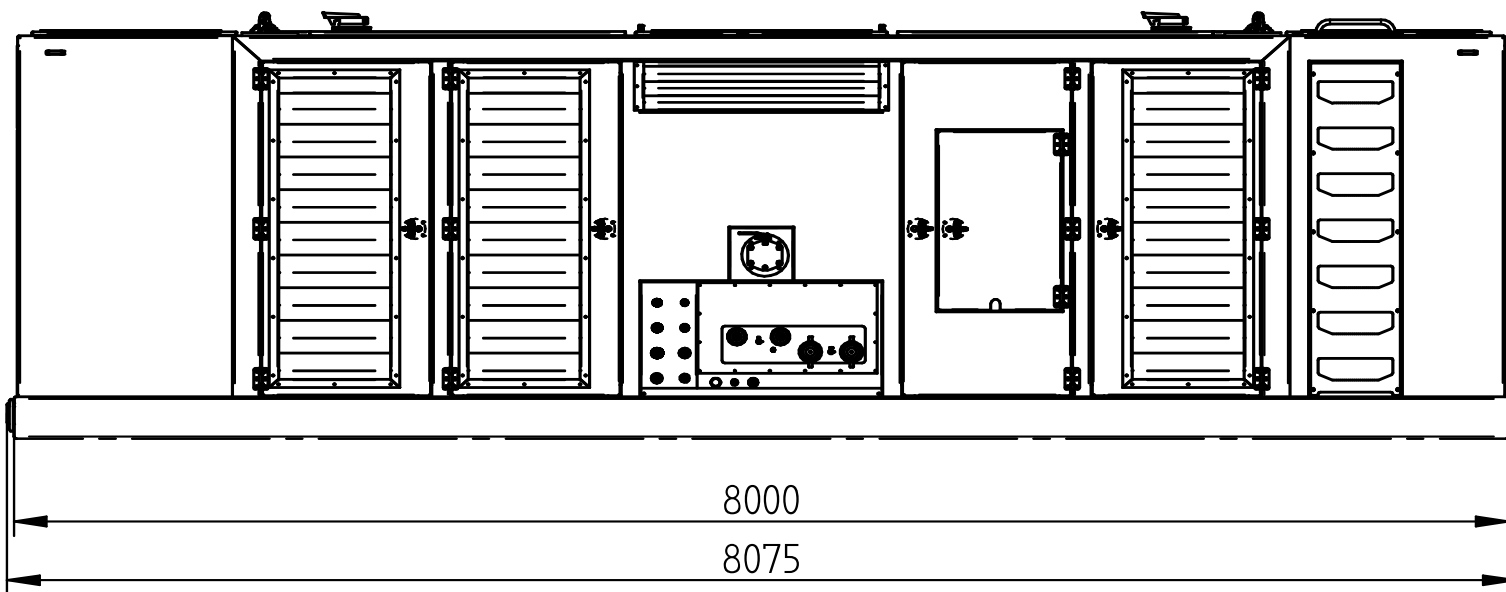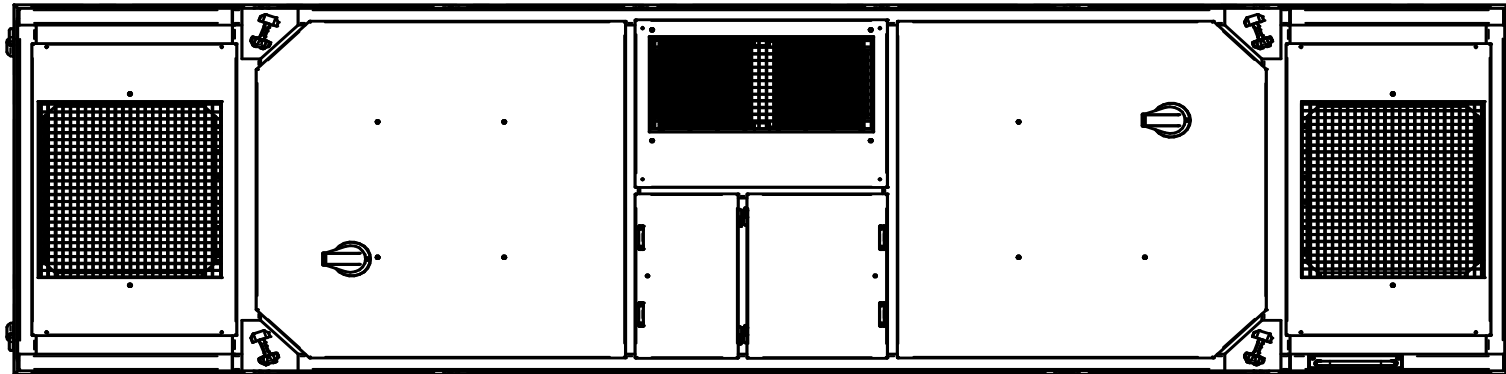

Especificaciones ICE 1600 STAGE V / TIER 4F		
Motor de diesel	Volvo Penta TWD 1683 VE (2x)	
Potencia Máxima teórica	1170/1592	kW/HP
Frecuencia máxima	1900	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	1620	L/min
Gasóleo	2200	L
Capacidad DEF (AdBlue)	140	L
El aceite hidráulico	3100	L
Peso sin gasóleo	16080	kg
Peso	18000	kg




Specifications

ICE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

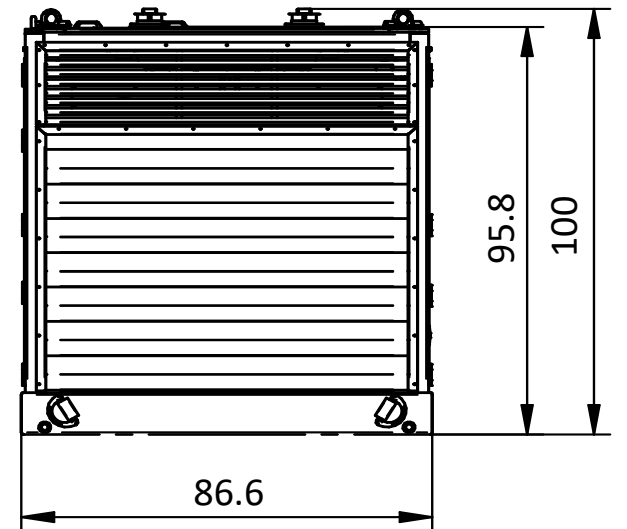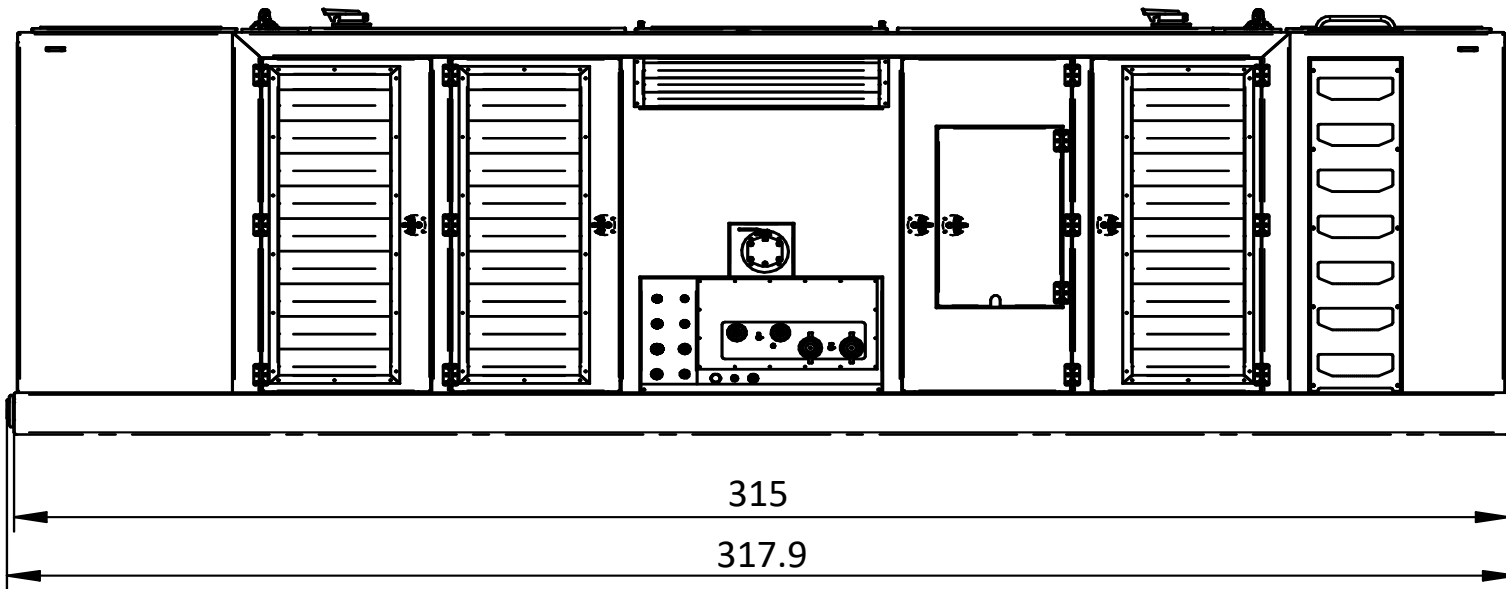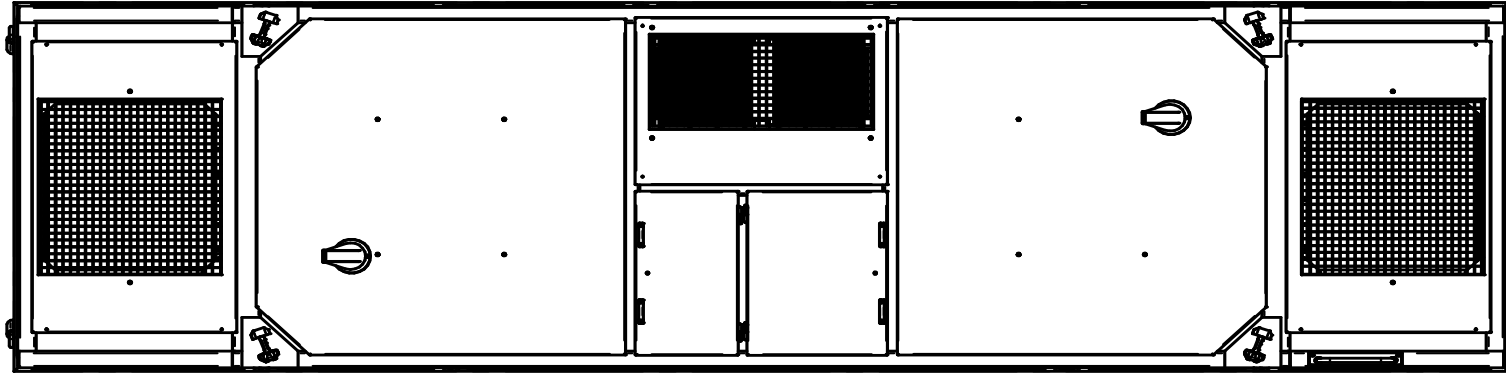

Specifications

ICE 1600 STAGE V / TIER 4F




Diesel Engine	Volvo Penta TWD 1683 VE (2x)	
Max. theoretical power	1,170/1,592	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	428	gal/min
Diesel Fuel	581	gal
DEF (AdBlue) capacity	37	gal
Hydraulic oil	819	gal
Weight without fuel	35,450	lbs
Weight with fuel	39,683	lbs

Specificatii

ICE 1600 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

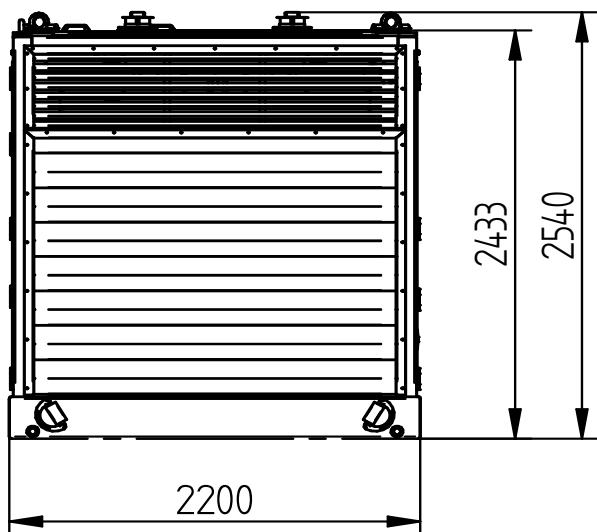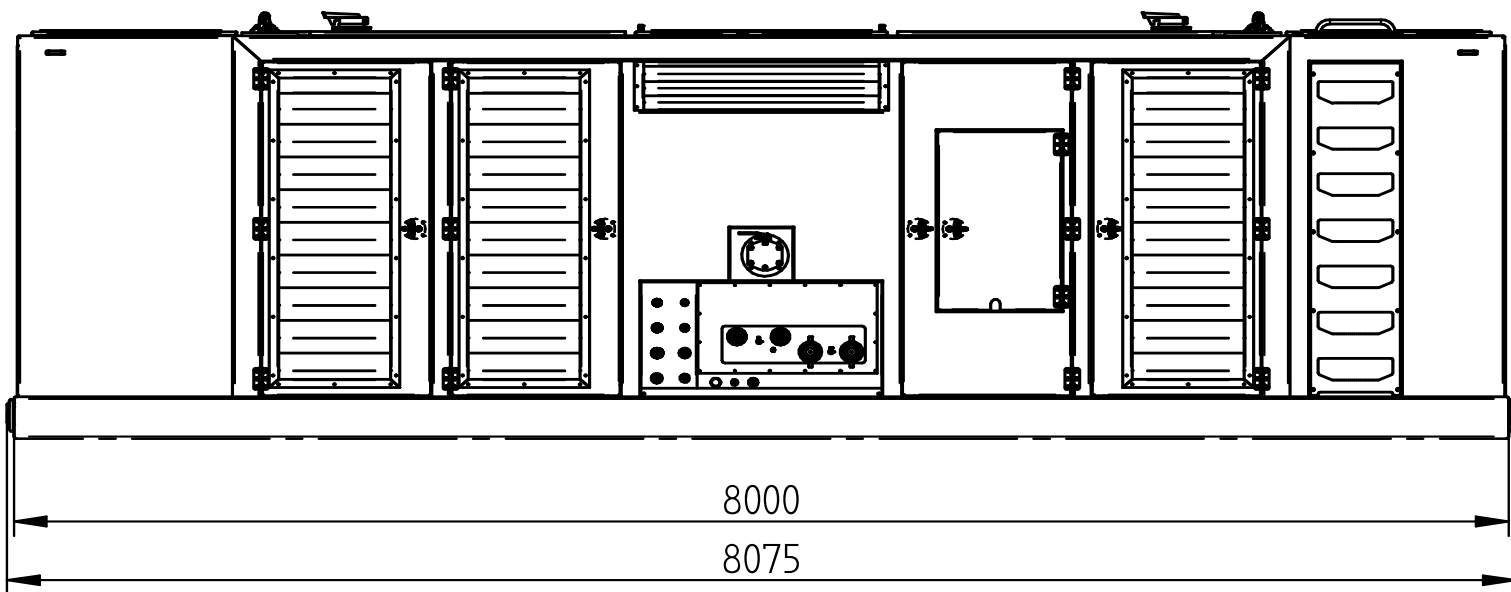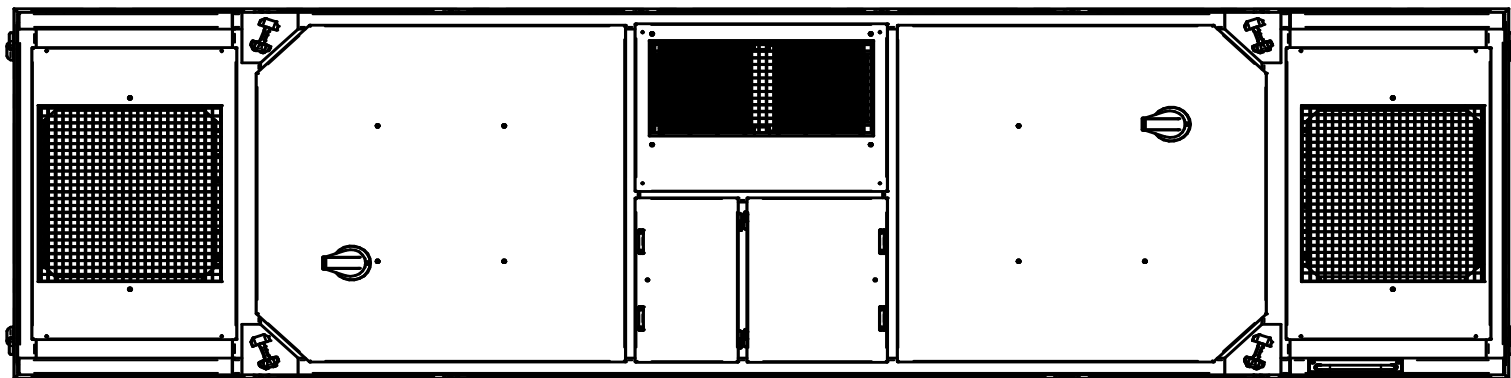

Specificatii :			ICE 1600 STAGE V / TIER 4F
Motor diesel	Volvo Penta TWD 1683 VE (2x)		
Puterea maxima teoretica	1170/1592		kW/HP
Frecventa maxima	1900		rpm
Presiune maxima de lucru	350		bar
Pompa hidraulica	Parker		
Debit maxim de ulei	1620		L/min
motorină	2200		L
Capacitate rezervor aditiv AdBlue	140		L
Ulei hidraulic	3100		L
Greutatea fara combustibil	16080		kg
Greutatea cu combustibil	18000		kg