
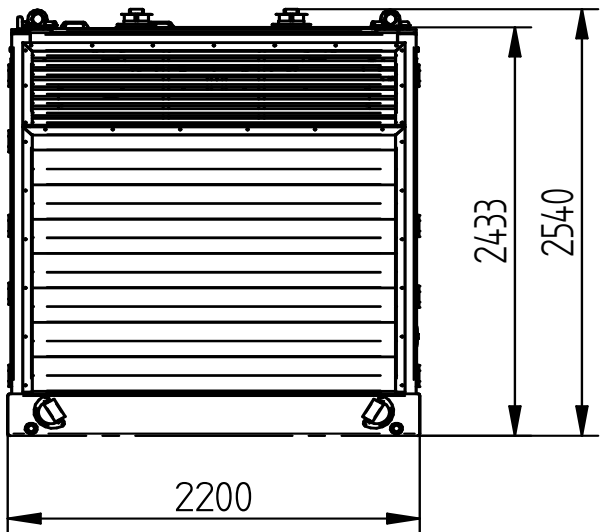
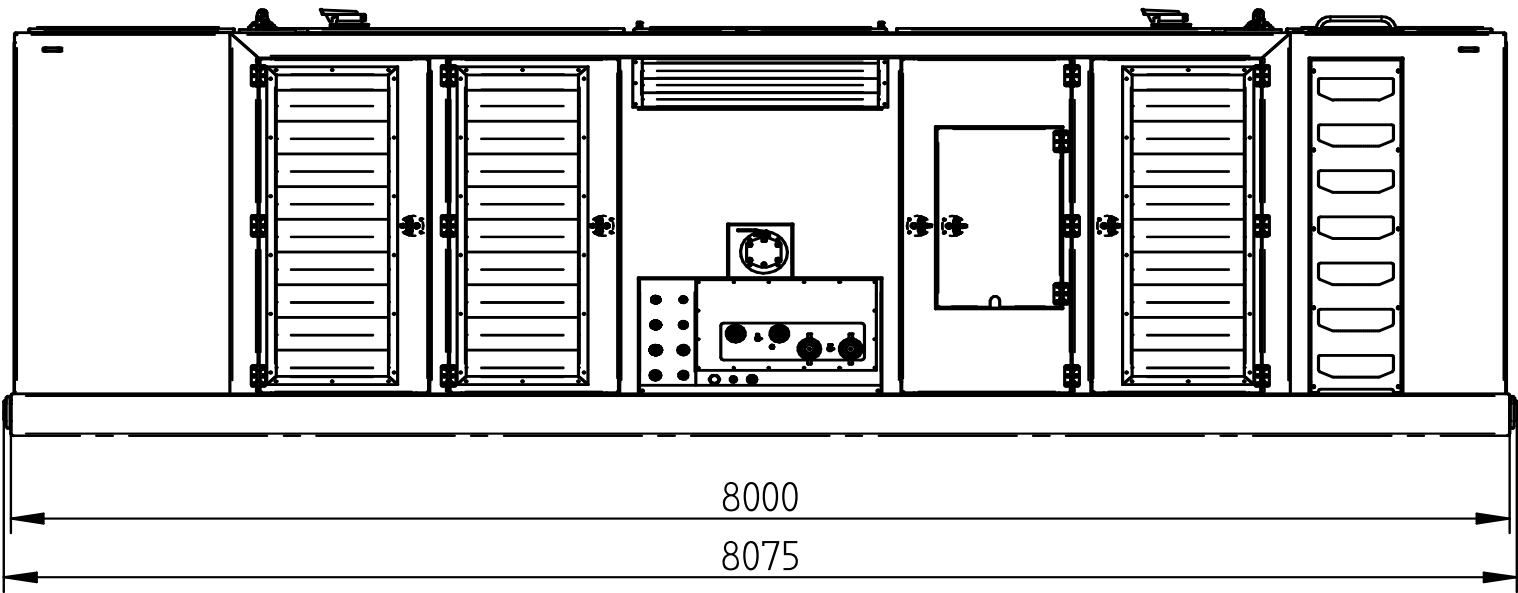


Specification sheet




PVE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

English

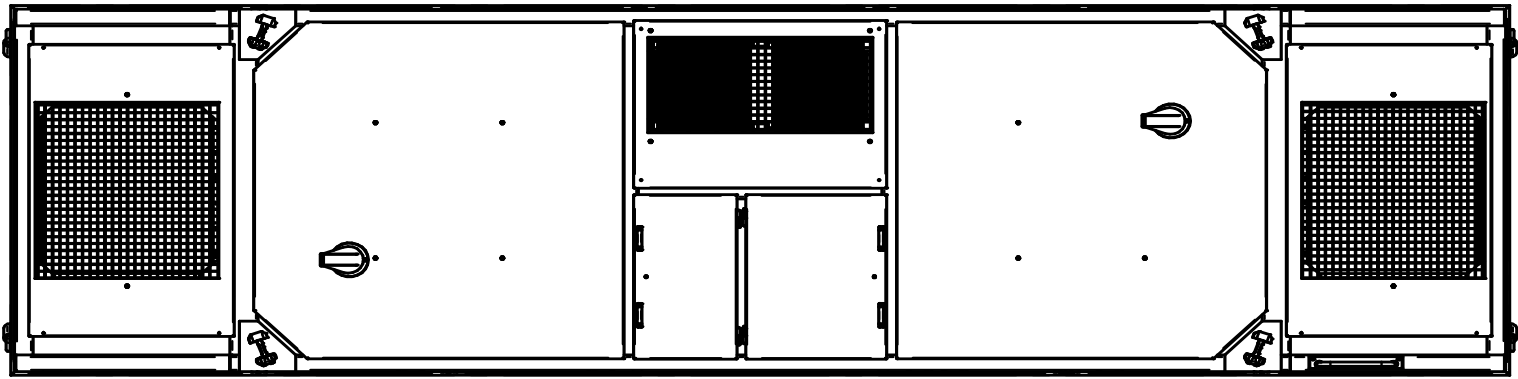

Specifications :	PVE 1600 STAGE V / TIER 4F	
Diesel Engine	Caterpillar C18 (2x)	
Max. theoretical power	1126/1510	kW/HP
Max. frequency	1800	rpm
Max. operating pressure	350	bar
Hydraulic pump	Parker	
Max. oil flow	1620	L/min
Diesel oil	2200	L
DEF (AdBlue) capacity	N.A.	L
Hydraulic oil	3100	L
Weight without fuel	16080	kg
Weight filled up	18000	kg

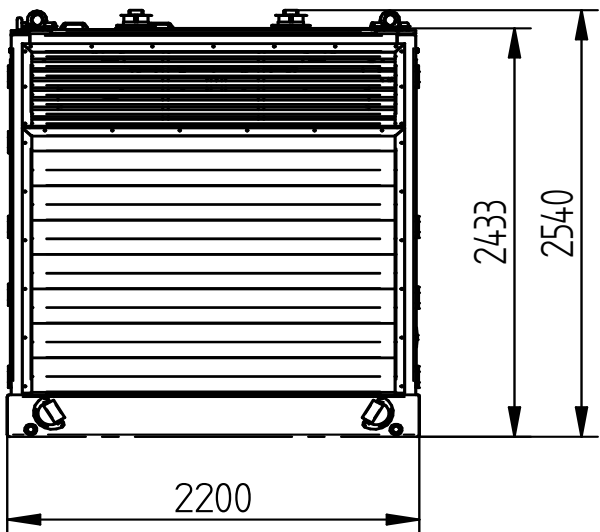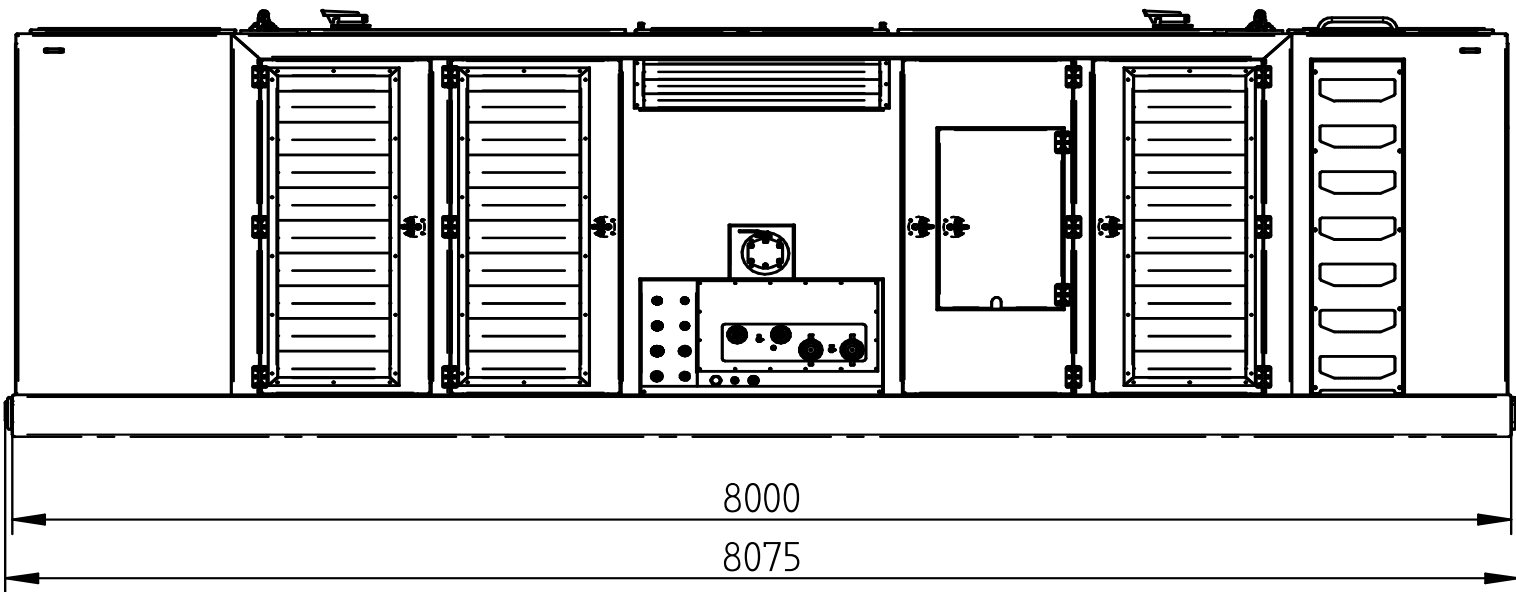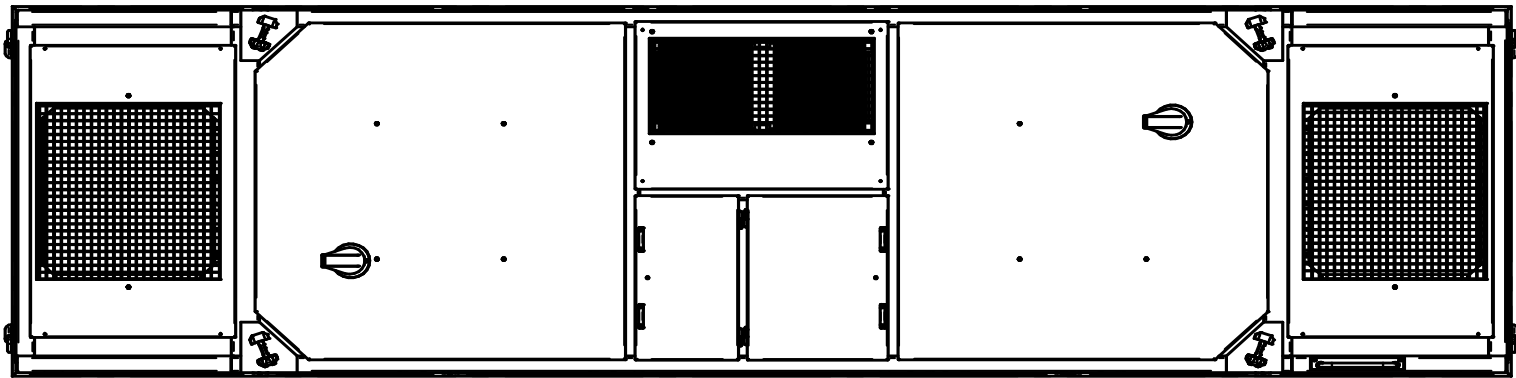




Technische Daten :		PVE 1600 STAGE V / TIER 4F	
Dieselmotor	Caterpillar C18 (2x)		
Max. theoretische Leistung	1126/1510		kW/HP
Max. Drehzahl	1800		rpm
Max. Betriebsdruck	350		bar
Hydraulische Pumpe	Parker		
Max. Fördermenge	1620		L/min
Diesel Öl	2200		L
DAF (AdBlue) kapazität	N.A.		L
Hydraulische Öl	3100		L
Gewicht ohne Diesel Öl	16080		kg
Gewicht	18000		kg

Spécifications

PVE 1600 STAGE V / TIER 4F

Groupe hydraulique

Français

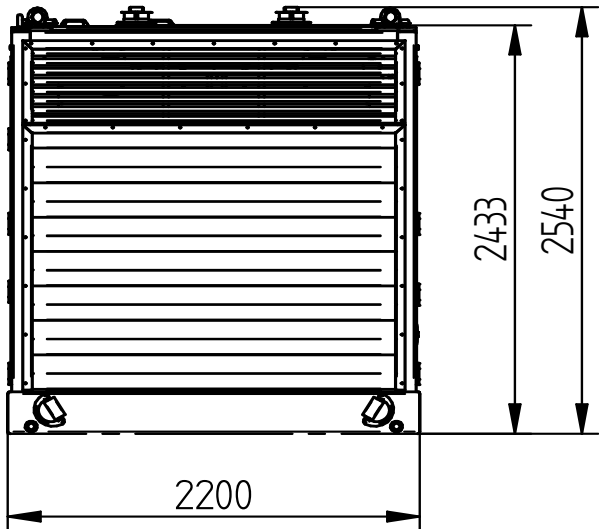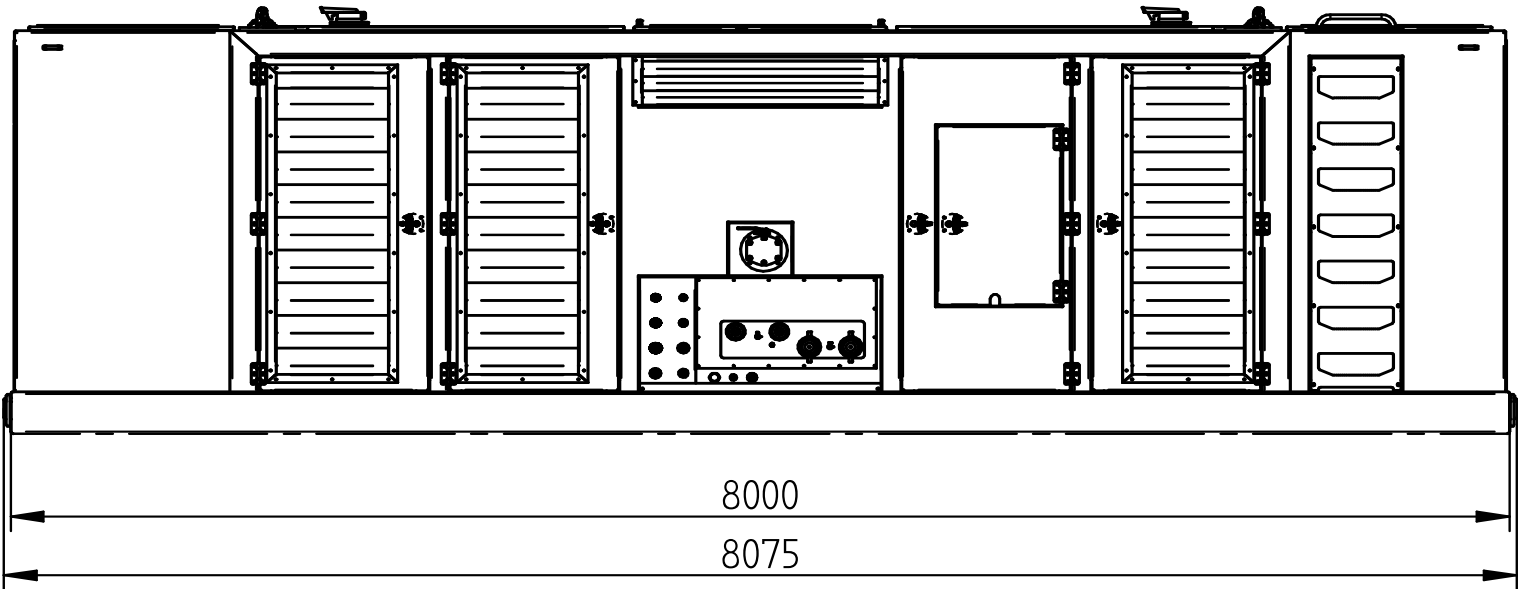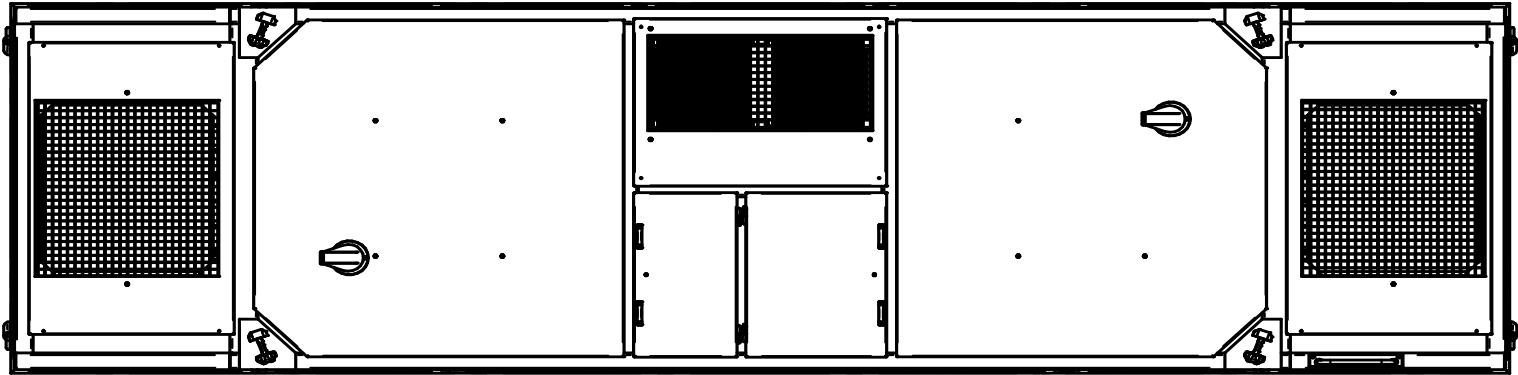

Spécifications		PVE 1600 STAGE V / TIER 4F	
Moteur Diesel	Caterpillar C18 (2x)		
Puissance théorique max.	1126/1510	kW/HP	
Max. fréquence	1800	rpm	
Pression de travail max.	350	bar	
Pompe hydraulique	Parker		
Débit d'huile max.	1620	L/min	
Huile diesel	2200	L	
Capacité FED (AdBlue)	N.A.	L	
Huile hydraulique	3100	L	
Poids sans huile diesel	16080	kg	
Poids	18000	kg	






Specificaties

PVE 1600 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

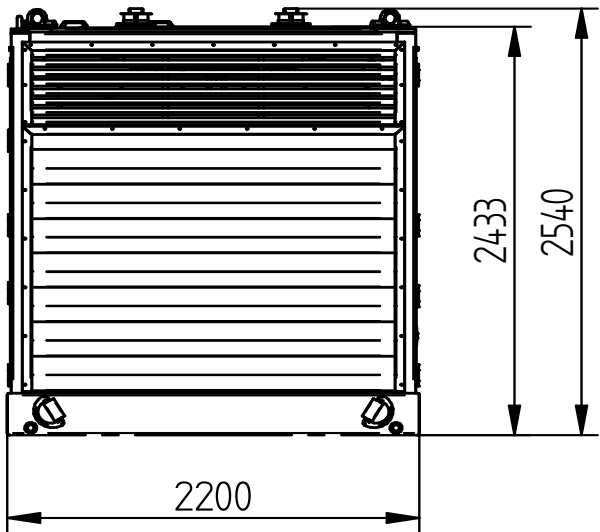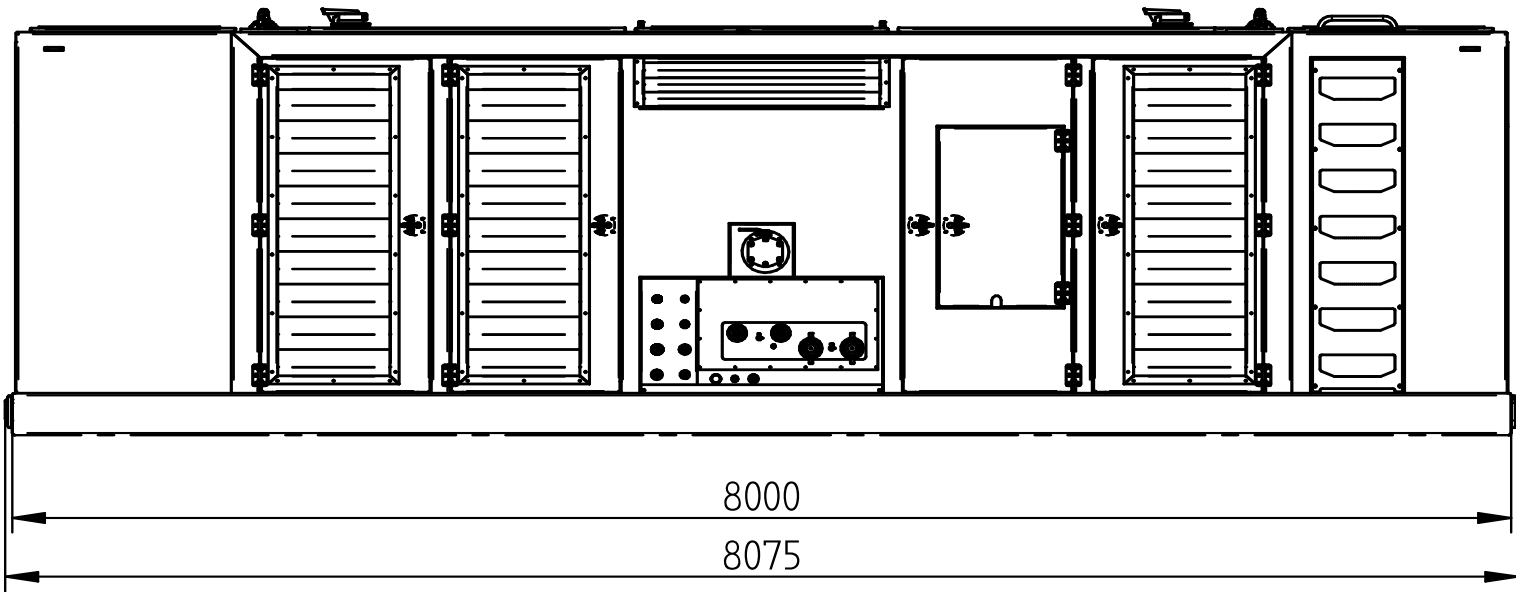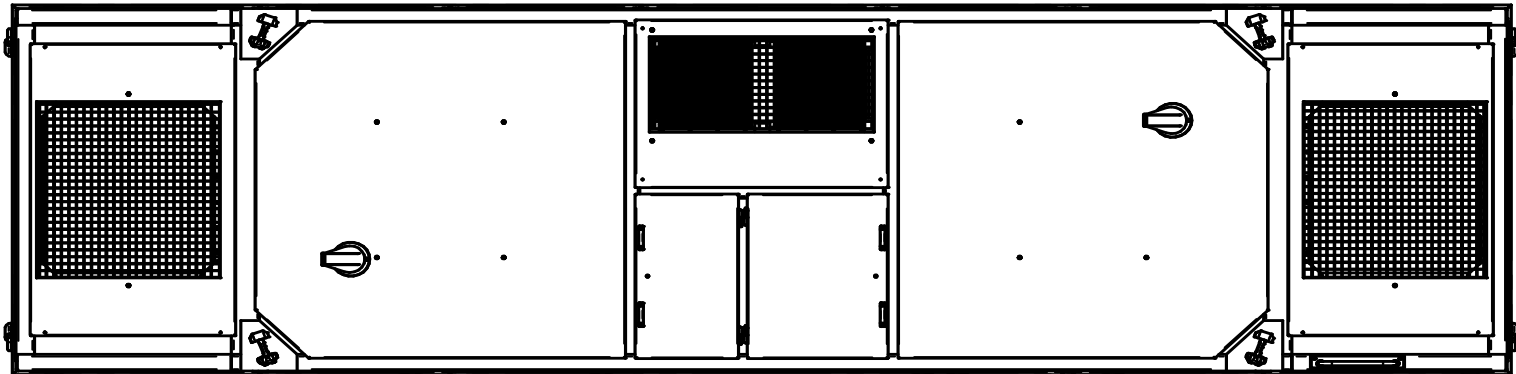




Specificaties			PVE 1600 STAGE V / TIER 4F
Dieselmotor	Caterpillar C18 (2x)		
Max. theoretisch vermogen	1126/1510		kW/HP
Max. toerental	1800		rpm
Max. werkdruk	350		bar
Hydraulische pomp	Parker		
Max. olie doorstroming	1620		L/min
Diesel olie	2200		L
DEF (AdBlue) capaciteit	N.A.		L
Hydraulische olie	3100		L
Gewicht zonder diesel	16080		kg
Gewicht	18000		kg



Especificaciones

PVE 1600 STAGE V / TIER 4F

Unidat de potencia

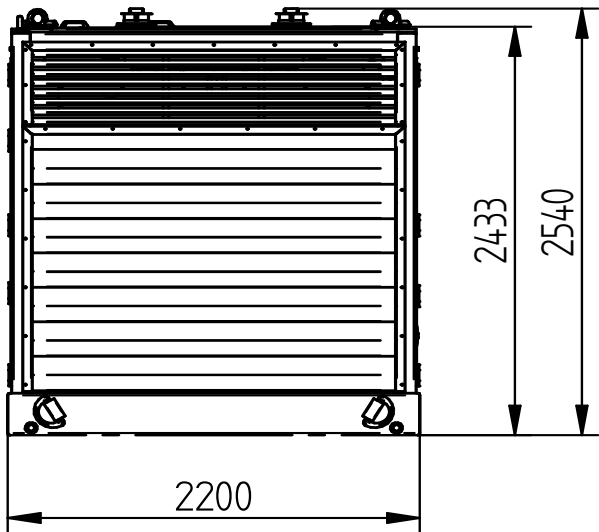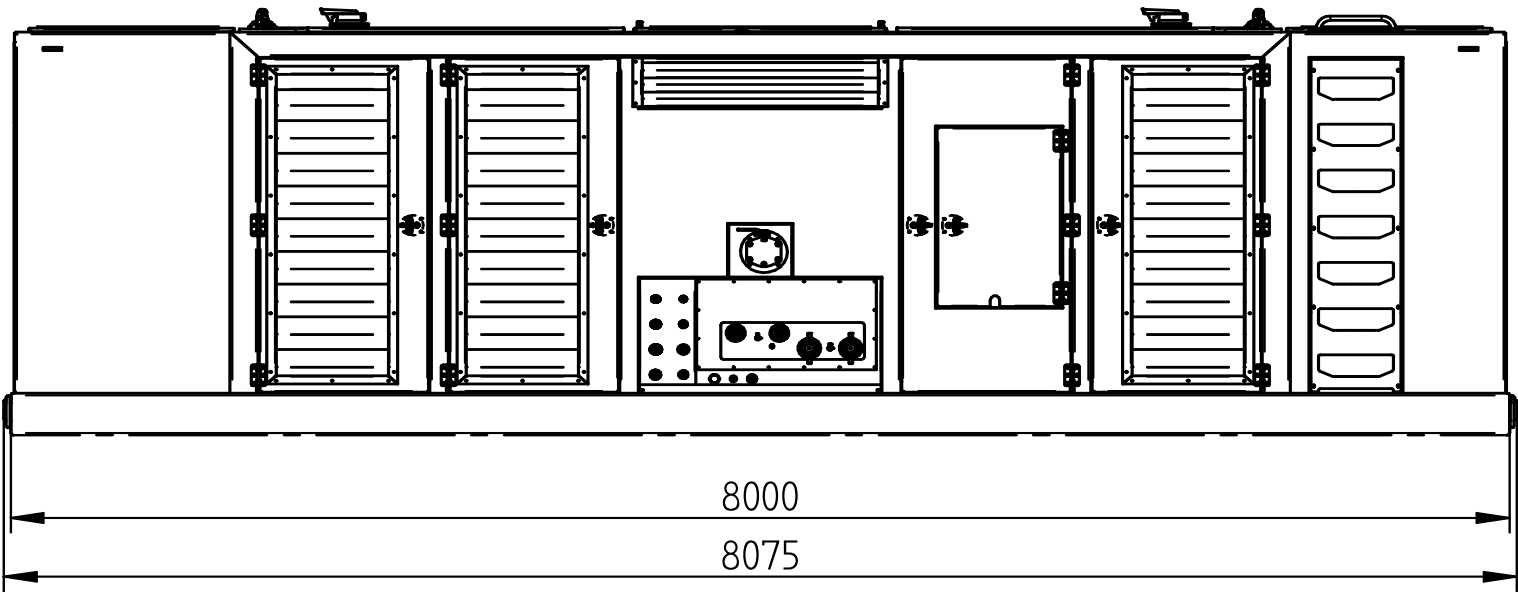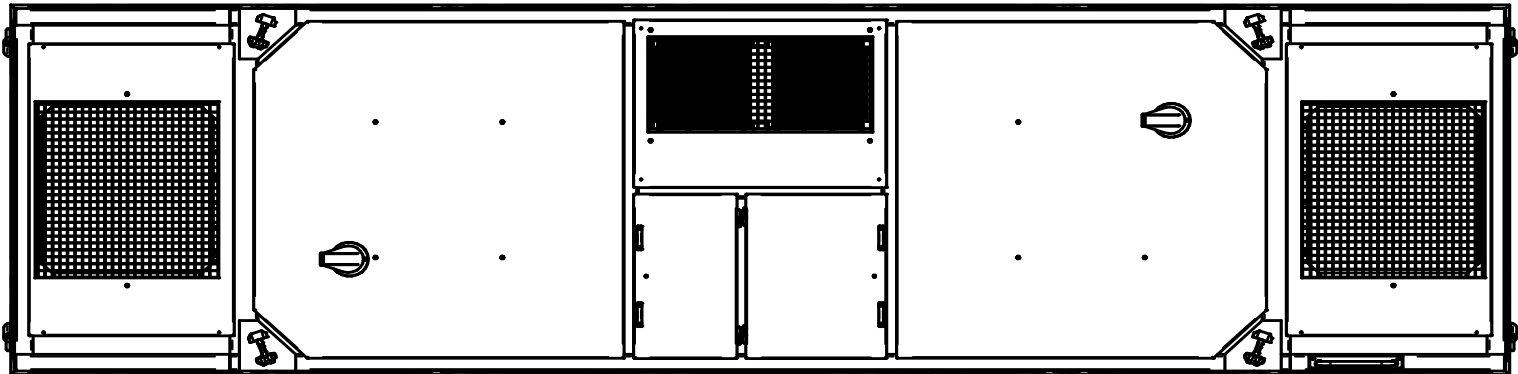

Especificaciones

PVE 1600 STAGE V / TIER 4F

Motor de diesel	Caterpillar C18 (2x)	
Potencia Máxima teórica	1126/1510	kW/HP
Frecuencia máxima	1800	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Parker	
Flujo de aceite máximo	1620	L/min
Gasóleo	2200	L
Capacidad DEF (AdBlue)	N.A.	L
El aceite hidráulico	3100	L
Peso sin gasóleo	16080	kg
Peso	18000	kg




Specifications

PVE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

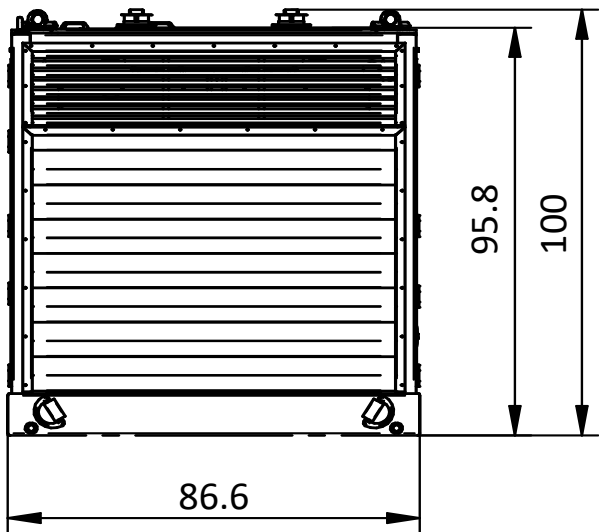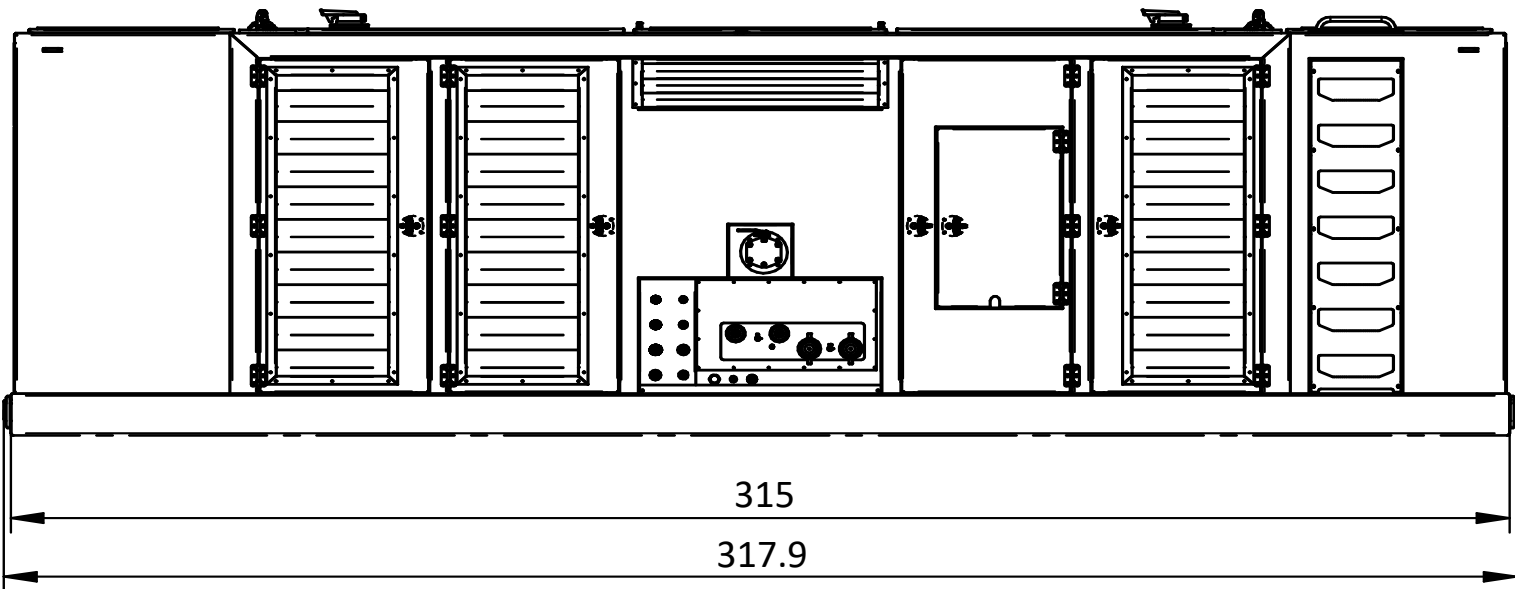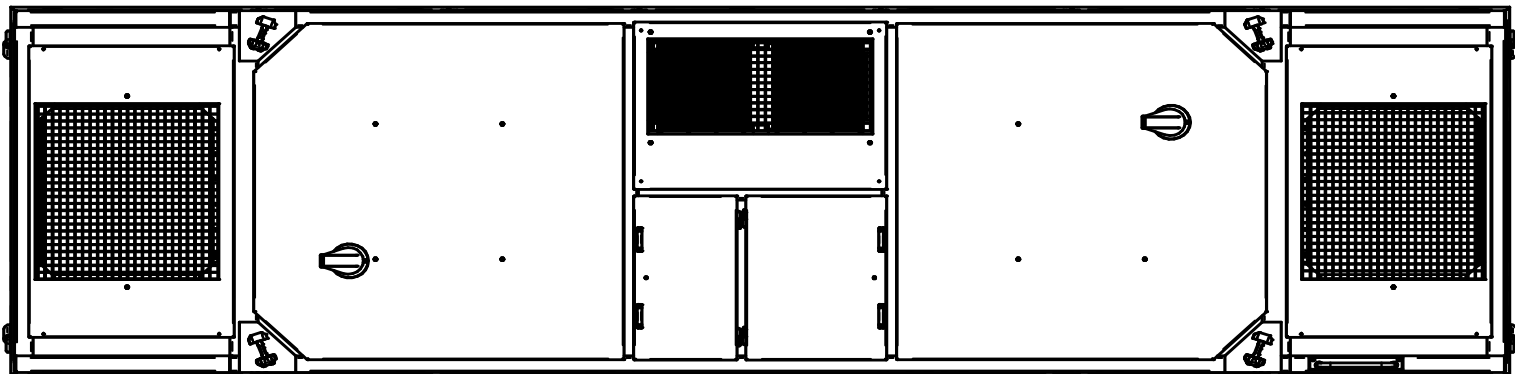

Specifications	PVE 1600 STAGE V / TIER 4F	
Diesel Engine	Caterpillar C18 (2x)	
Max. theoretical power	1,126/1,510	kW/HP
Max. frequency	1,800	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	428	gal/min
Diesel Fuel	581	gal
DEF (AdBlue) capacity	N.A.	gal
Hydraulic oil	819	gal
Weight without fuel	35,450	lbs
Weight with fuel	39,683	lbs






Specificatii

PVE 1600 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

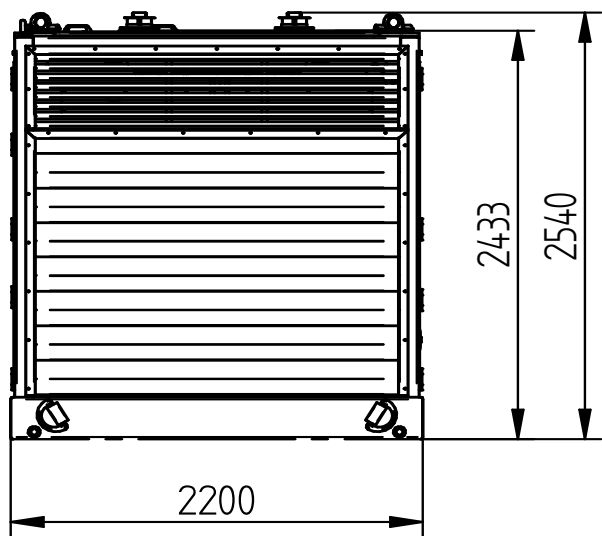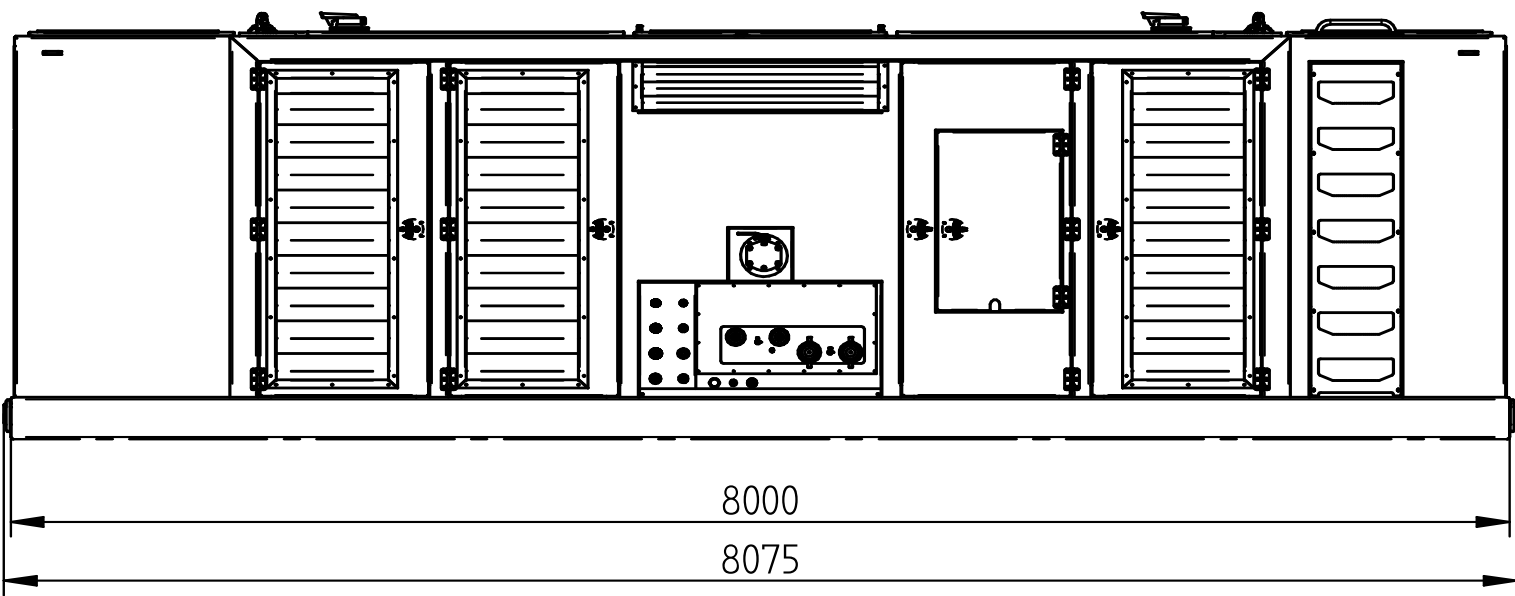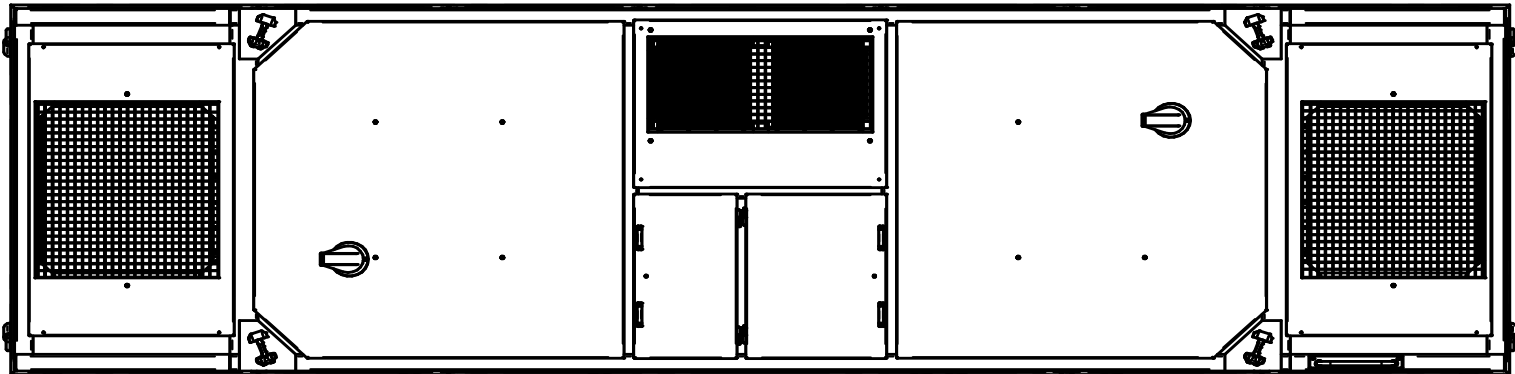

Specificatii :

PVE 1600 STAGE V / TIER 4F

Motor diesel	Caterpillar C18 (2x)	
Puterea maxima teoretica	1126/1510	kW/HP
Frecventa maxima	1800	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	1620	L/min
motorină	2200	L
Capacitate rezervor aditiv AdBlue	N.A.	L
Ulei hidraulic	3100	L
Greutatea fara combustibil	16080	kg
Greutatea cu combustibil	18000	kg