

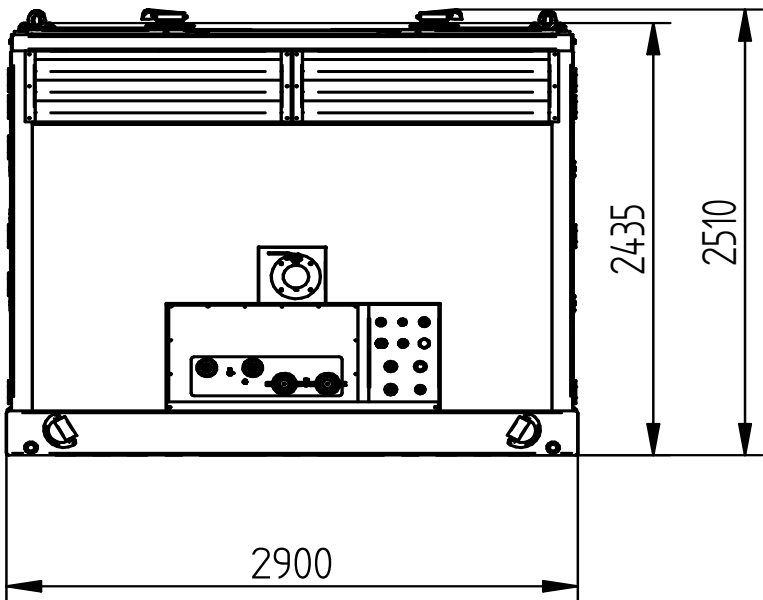


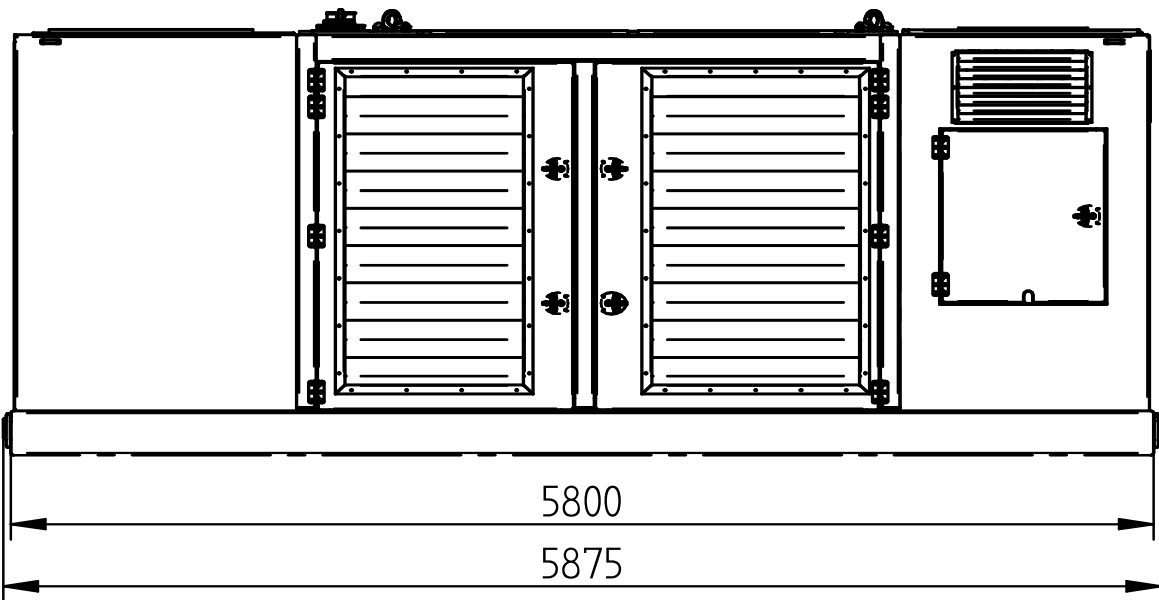




Specification sheet

PVE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

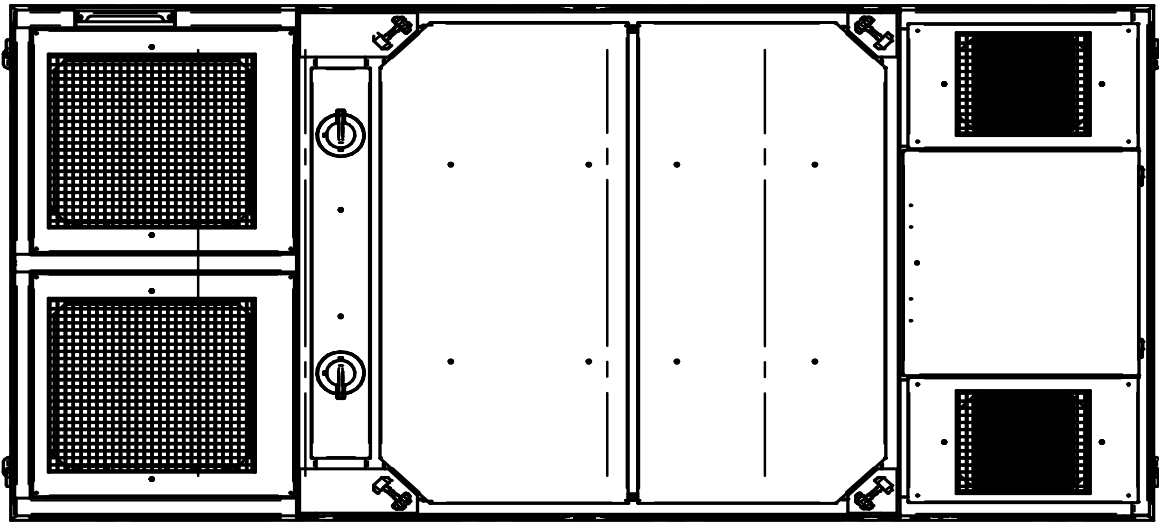

Specifications :		PVE 1600 STAGE V / TIER 4F	
Diesel Engine	Volvo Penta TWD 1683 VE (2x)		
Max. theoretical power	1170/1592		kW/HP
Max. frequency	1900		rpm
Max. operating pressure	350		bar
Hydraulic pump	Rexroth		
Max. oil flow	1710		L/min
Diesel oil	2130		L
DEF (AdBlue) capacity	140		L
Hydraulic oil	3300		L
Weight without fuel	17100		kg
Weight filled up	18900		kg

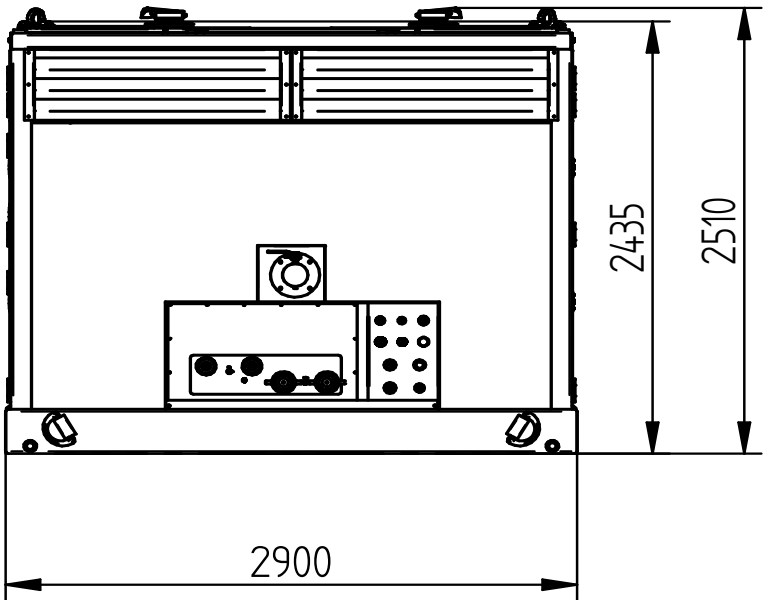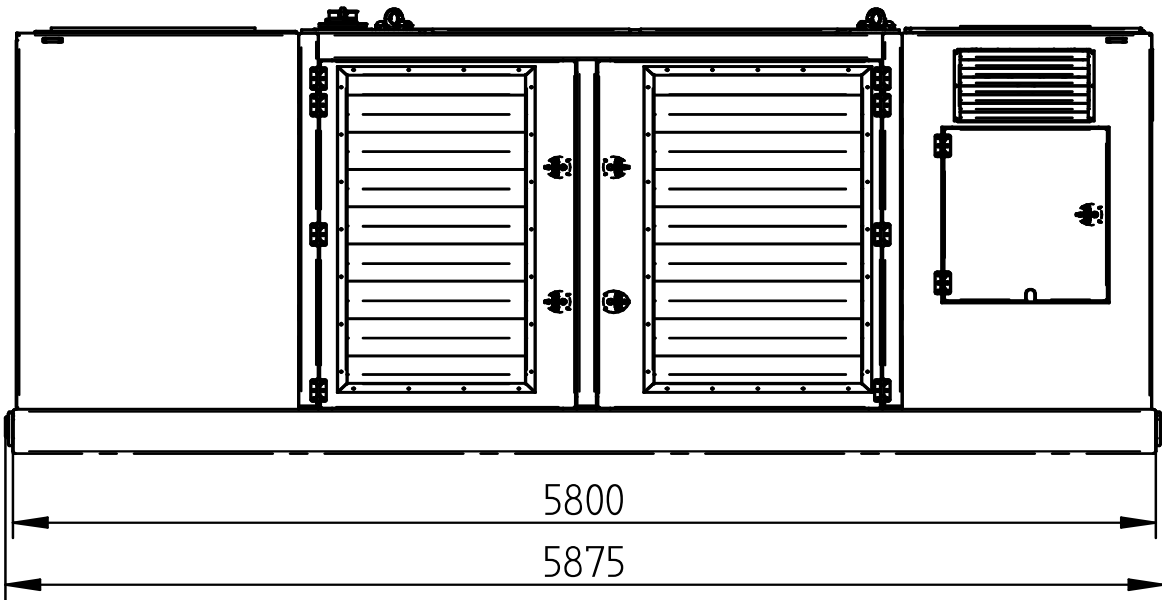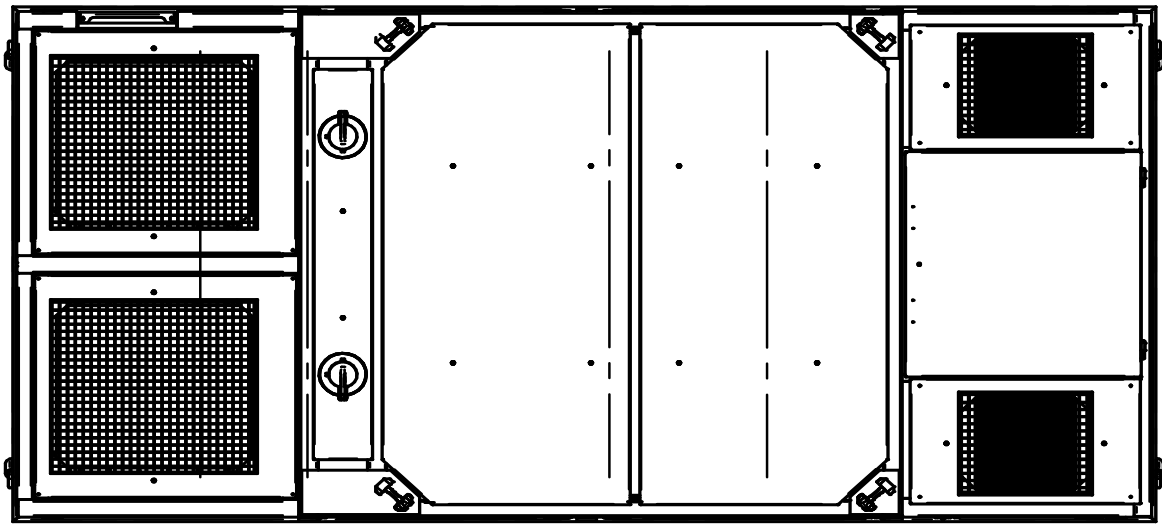




Technische Daten :		PVE 1600 STAGE V / TIER 4F	
Dieselmotor	Volvo Penta TWD 1683 VE (2x)		
Max. theoretische Leistung	1170/1592		kW/HP
Max. Drehzahl	1900		rpm
Max. Betriebsdruck	350		bar
Hydraulische Pumpe	Rexroth		
Max. Fördermenge	1710		L/min
Diesel Öl	2130		L
DAF (AdBlue) kapazität	140		L
Hydraulische Öl	3300		L
Gewicht ohne Diesel Öl	17100		kg
Gewicht	18900		kg



Spécifications

PVE 1600 STAGE V / TIER 4F

Groupe hydraulique

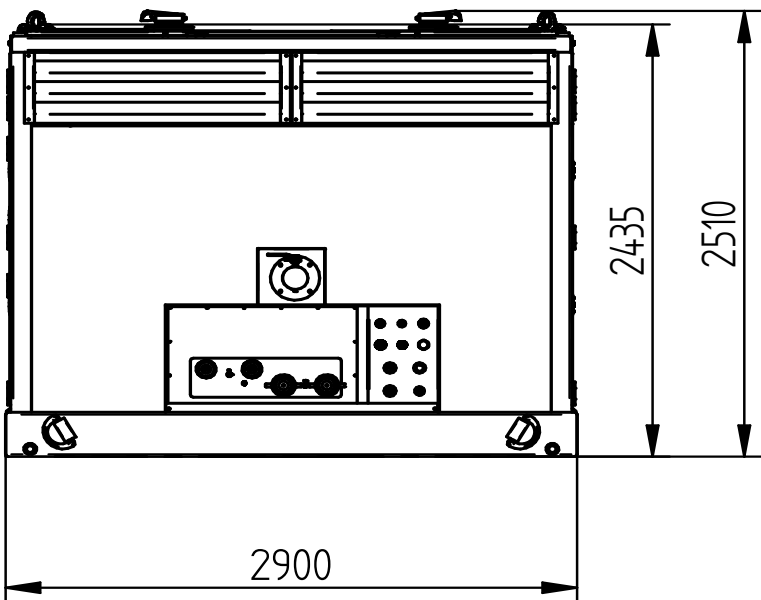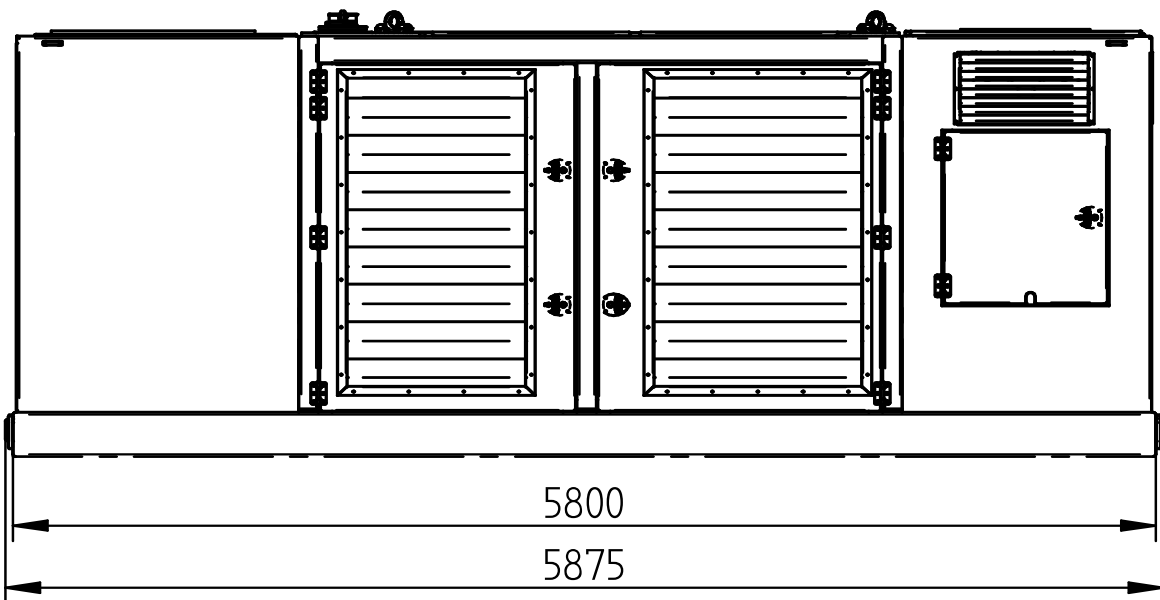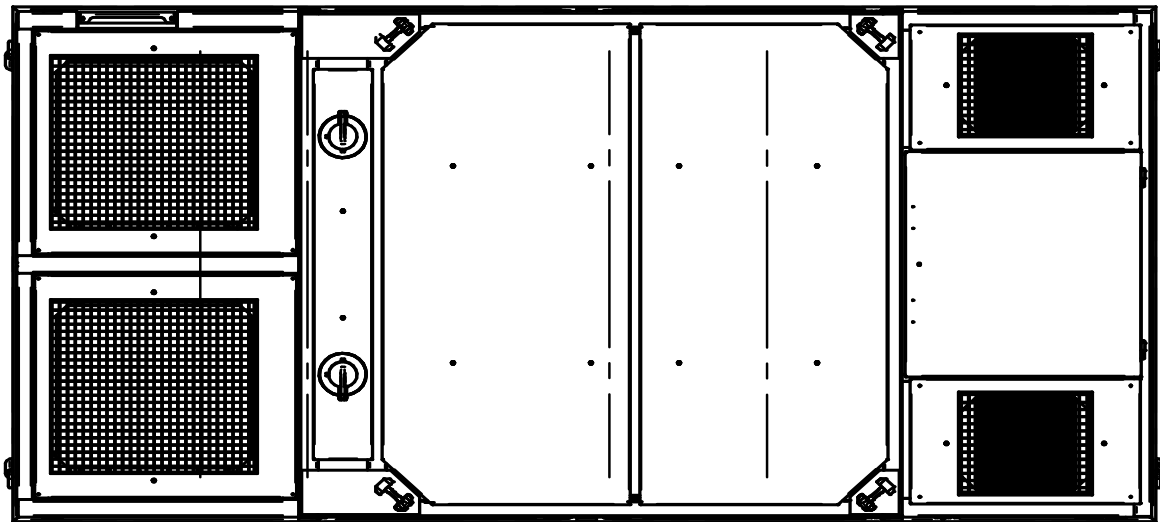

Spécifications		PVE 1600 STAGE V / TIER 4F	
Moteur Diesel	Volvo Penta TWD 1683 VE (2x)		
Puissanse théorique max.	1170/1592		kW/HP
Max. fréquence	1900		rpm
Pression de travail max.	350		bar
Pompe hydraulique	Rexroth		
Débit d'huile max.	1710		L/min
Huile diesel	2130		L
Capacité FED (AdBlue)	140		L
Huile hydraulique	3300		L
Poids sans huile diesel	17100		kg
Poids	18900		kg






Specificaties

PVE 1600 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

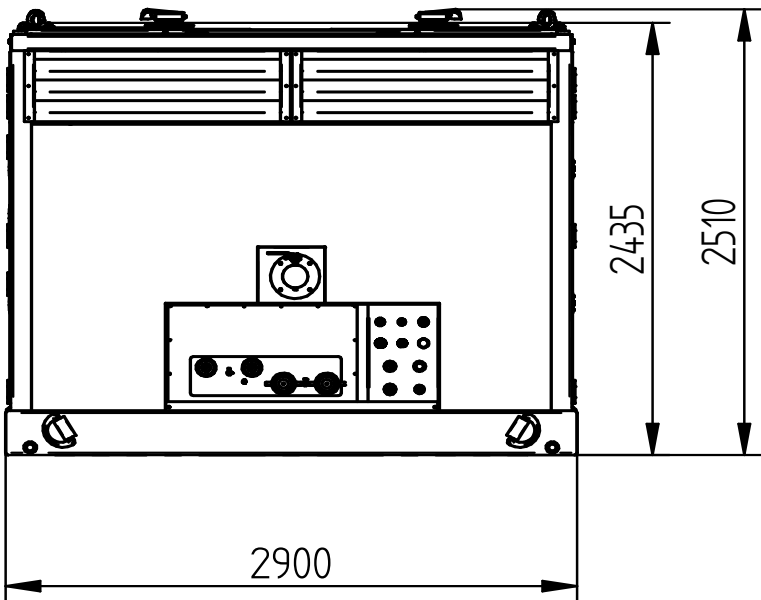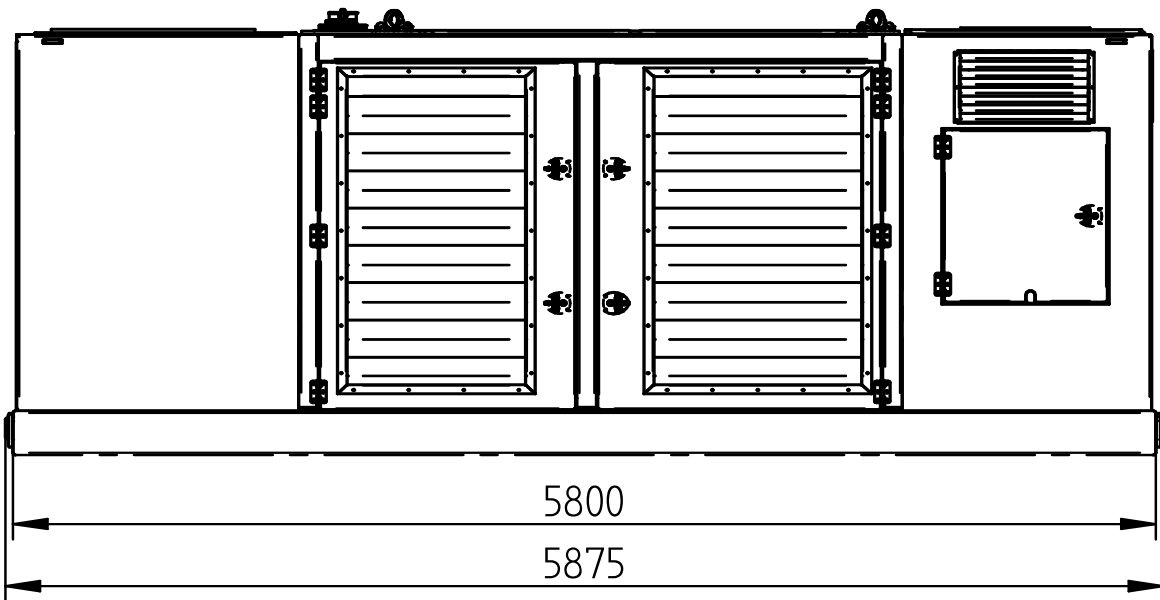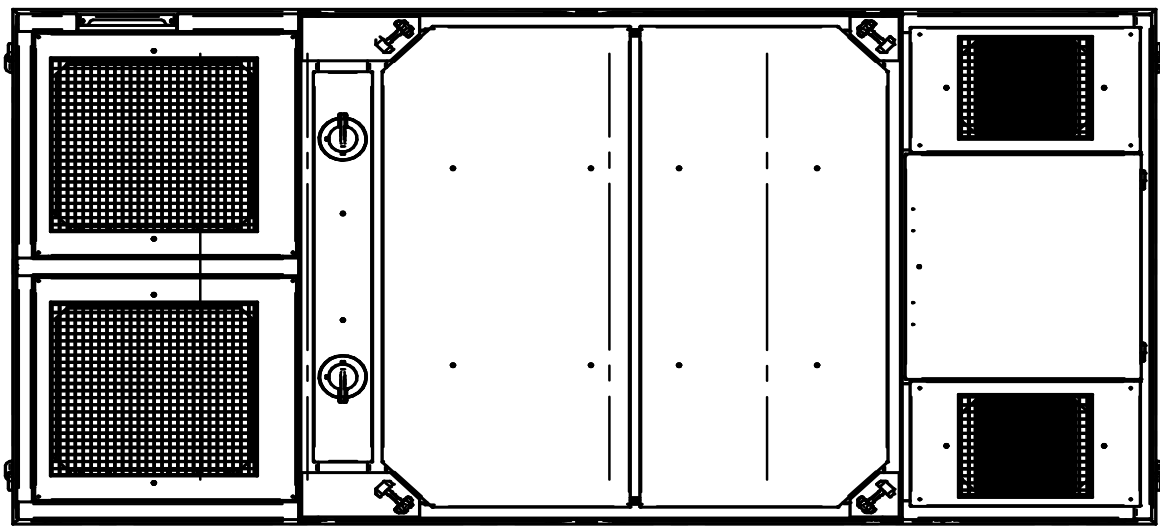




Specificaties			PVE 1600 STAGE V / TIER 4F
Dieselmotor	Volvo Penta TWD 1683 VE (2x)		
Max. theoretisch vermogen	1170/1592		kW/HP
Max. toerental	1900		rpm
Max. werkdruk	350		bar
Hydraulische pomp	Rexroth		
Max. olie doorstroming	1710		L/min
Diesel olie	2130		L
DEF (AdBlue) capaciteit	140		L
Hydraulische olie	3300		L
Gewicht zonder diesel	17100		kg
Gewicht	18900		kg



Especificaciones

PVE 1600 STAGE V / TIER 4F

Unidat de potencia

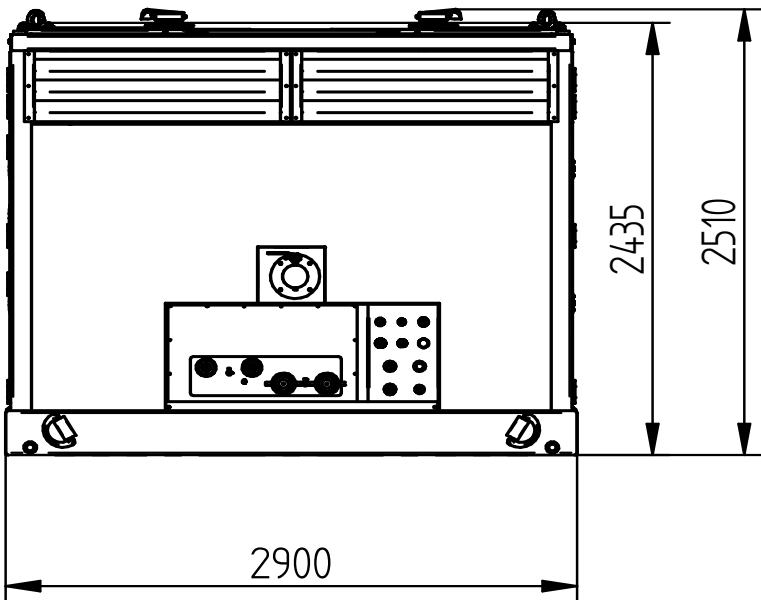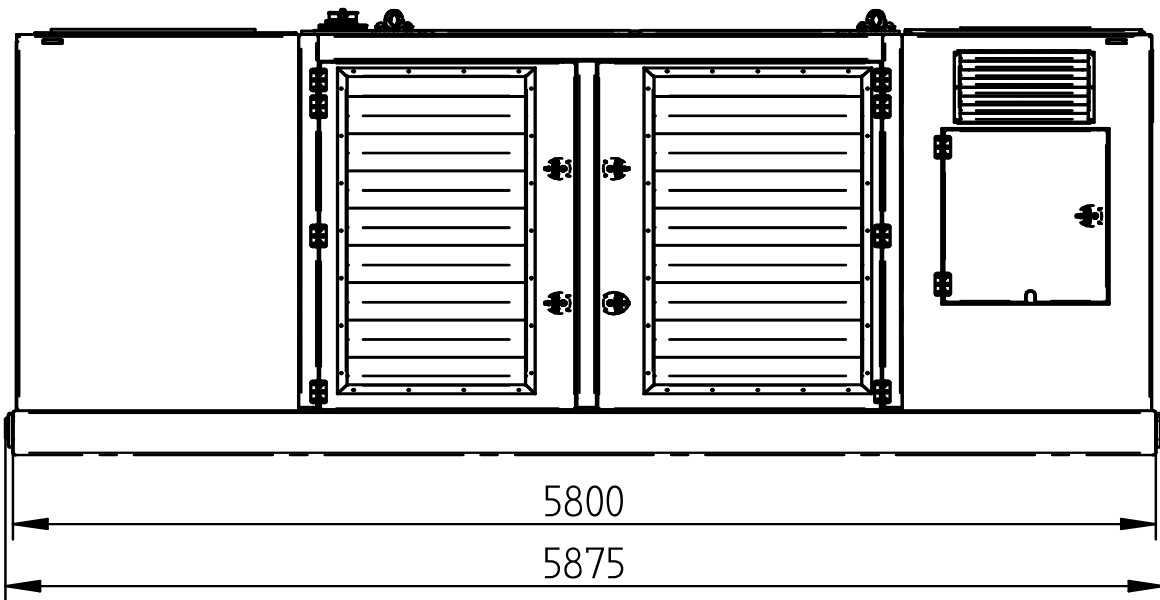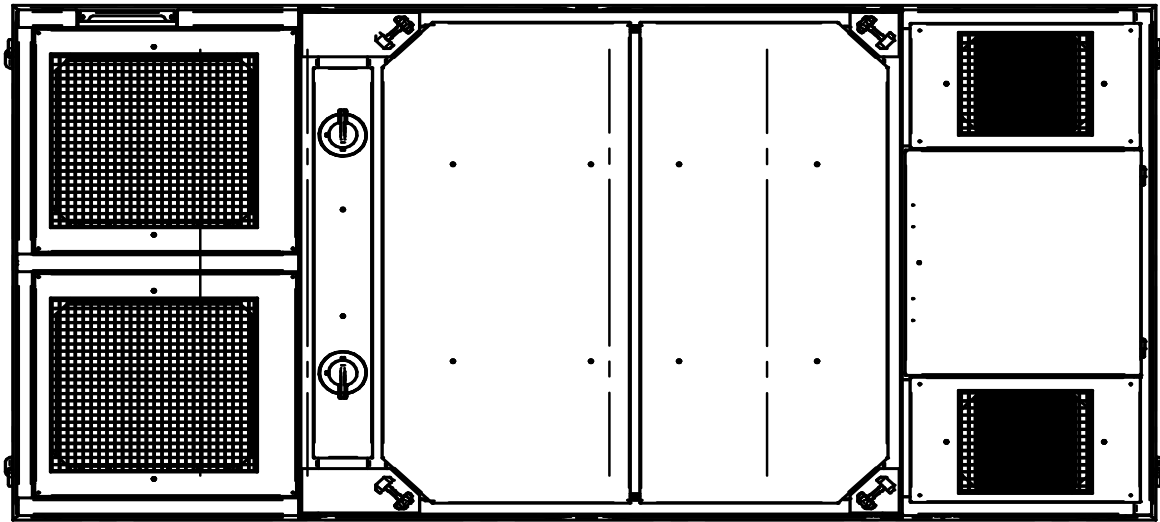

Especificaciones

PVE 1600 STAGE V / TIER 4F

Motor de diesel	Volvo Penta TWD 1683 VE (2x)	
Potencia Máxima teórica	1170/1592	kW/HP
Frecuencia máxima	1900	rpm
Presión máxima de trabajo	350	bar
Bomba hidráulica	Rexroth	
Flujo de aceite máximo	1710	L/min
Gasóleo	2130	L
Capacidad DEF (AdBlue)	140	L
El aceite hidráulico	3300	L
Peso sin gasóleo	17100	kg
Peso	18900	kg






Specifications

PVE 1600 STAGE V / TIER 4F

Hydraulic Power Pack

USA

Dimensions in inches

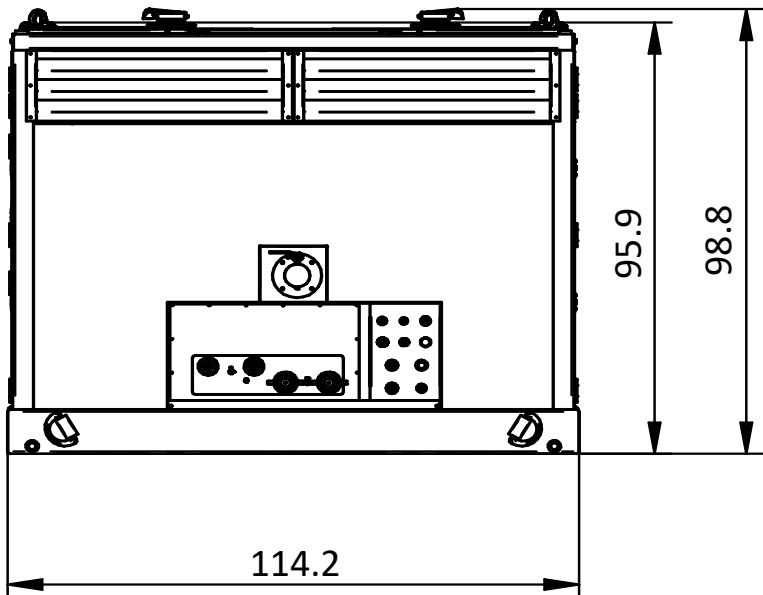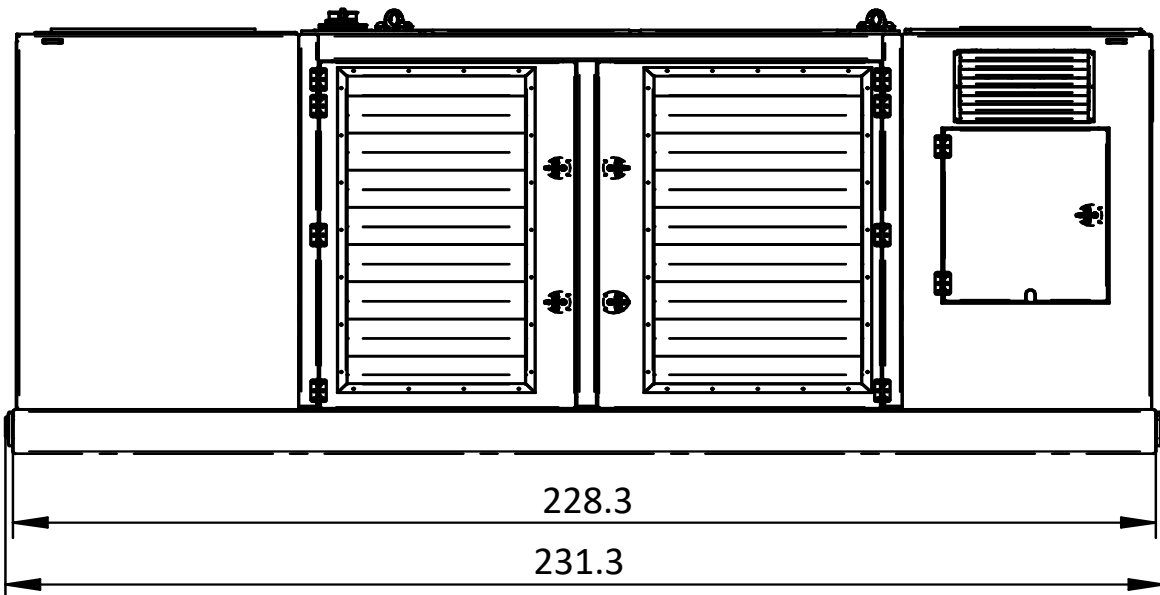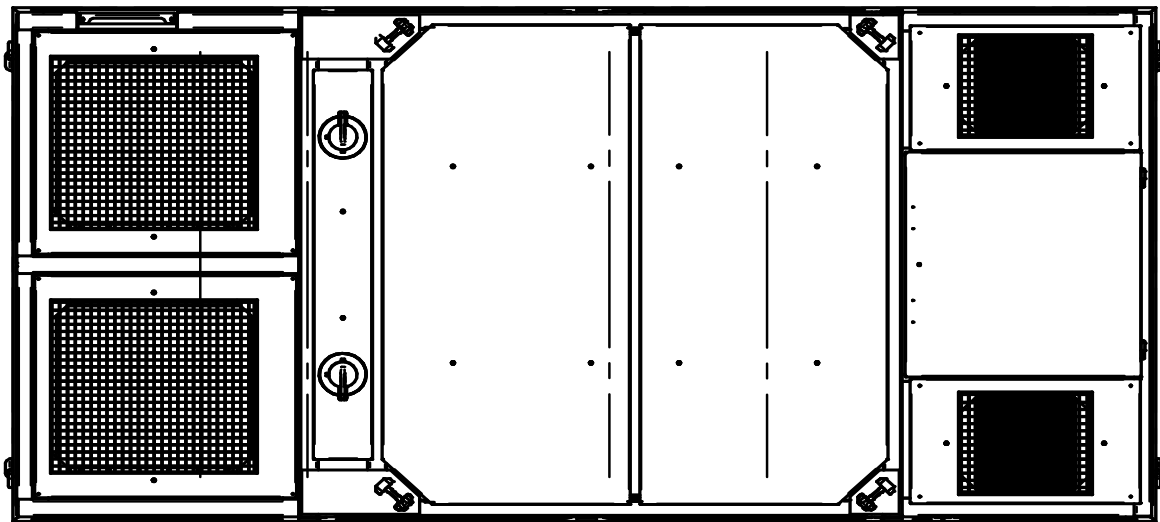

Specifications

PVE 1600 STAGE V / TIER 4F

Diesel Engine	Volvo Penta TWD 1683 VE (2x)	
Max. theoretical power	1,170/1,592	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Rexroth	
Max. oil flow	452	gal/min
Diesel Fuel	563	gal
DEF (AdBlue) capacity	37	gal
Hydraulic oil	872	gal
Weight without fuel	37,699	lbs
Weight with fuel	41,667	lbs






Specificatii

PVE 1600 STAGE V / TIER 4F

unitate de putere hidraulica

românesc

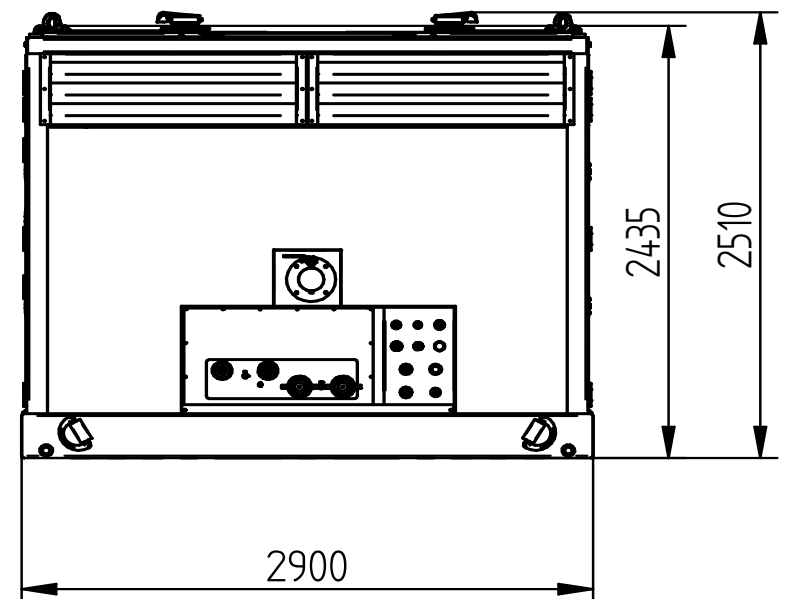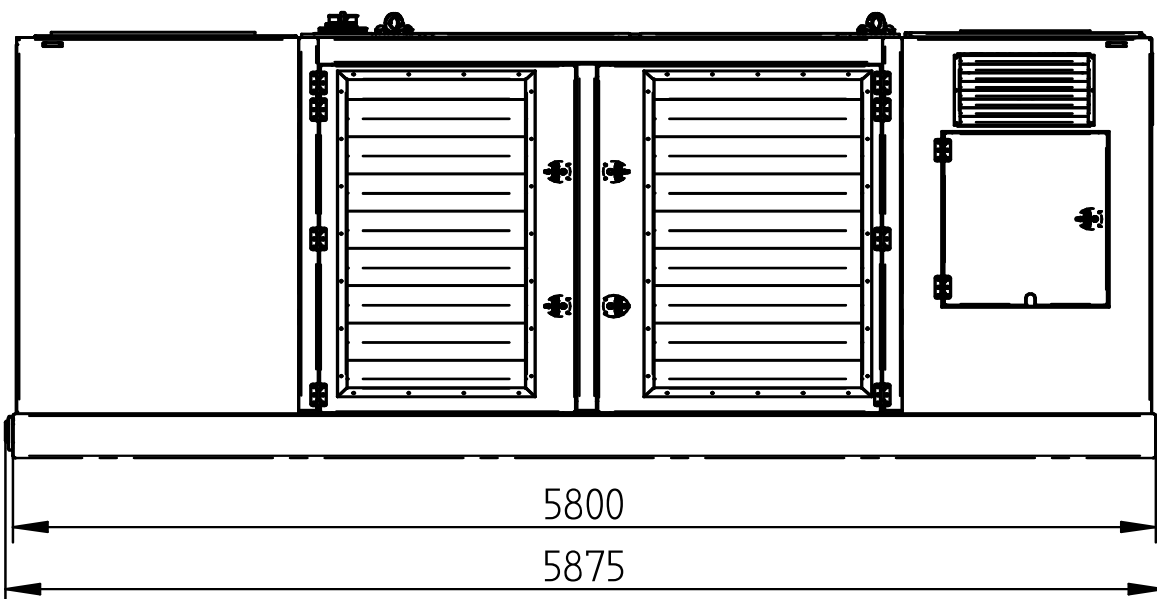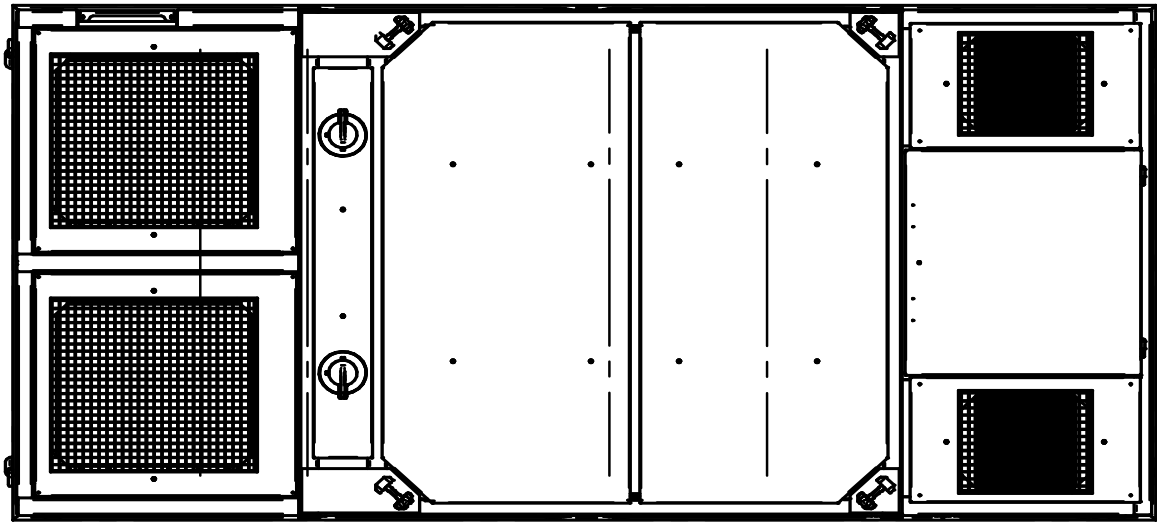

Specificatii :

PVE 1600 STAGE V / TIER 4F

Motor diesel	Volvo Penta TWD 1683 VE (2x)	
Puterea maxima teoretica	1170/1592	kW/HP
Frecventa maxima	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Rexroth	
Debit maxim de ulei	1710	L/min
motorină	2130	L
Capacitate rezervor aditiv AdBlue	140	L
Ulei hidraulic	3300	L
Greutatea fara combustibil	17100	kg
Greutatea cu combustibil	18900	kg