


Specification sheet

PVE 800 STAGE V / TIER 4F

Hydraulic Power Pack

English

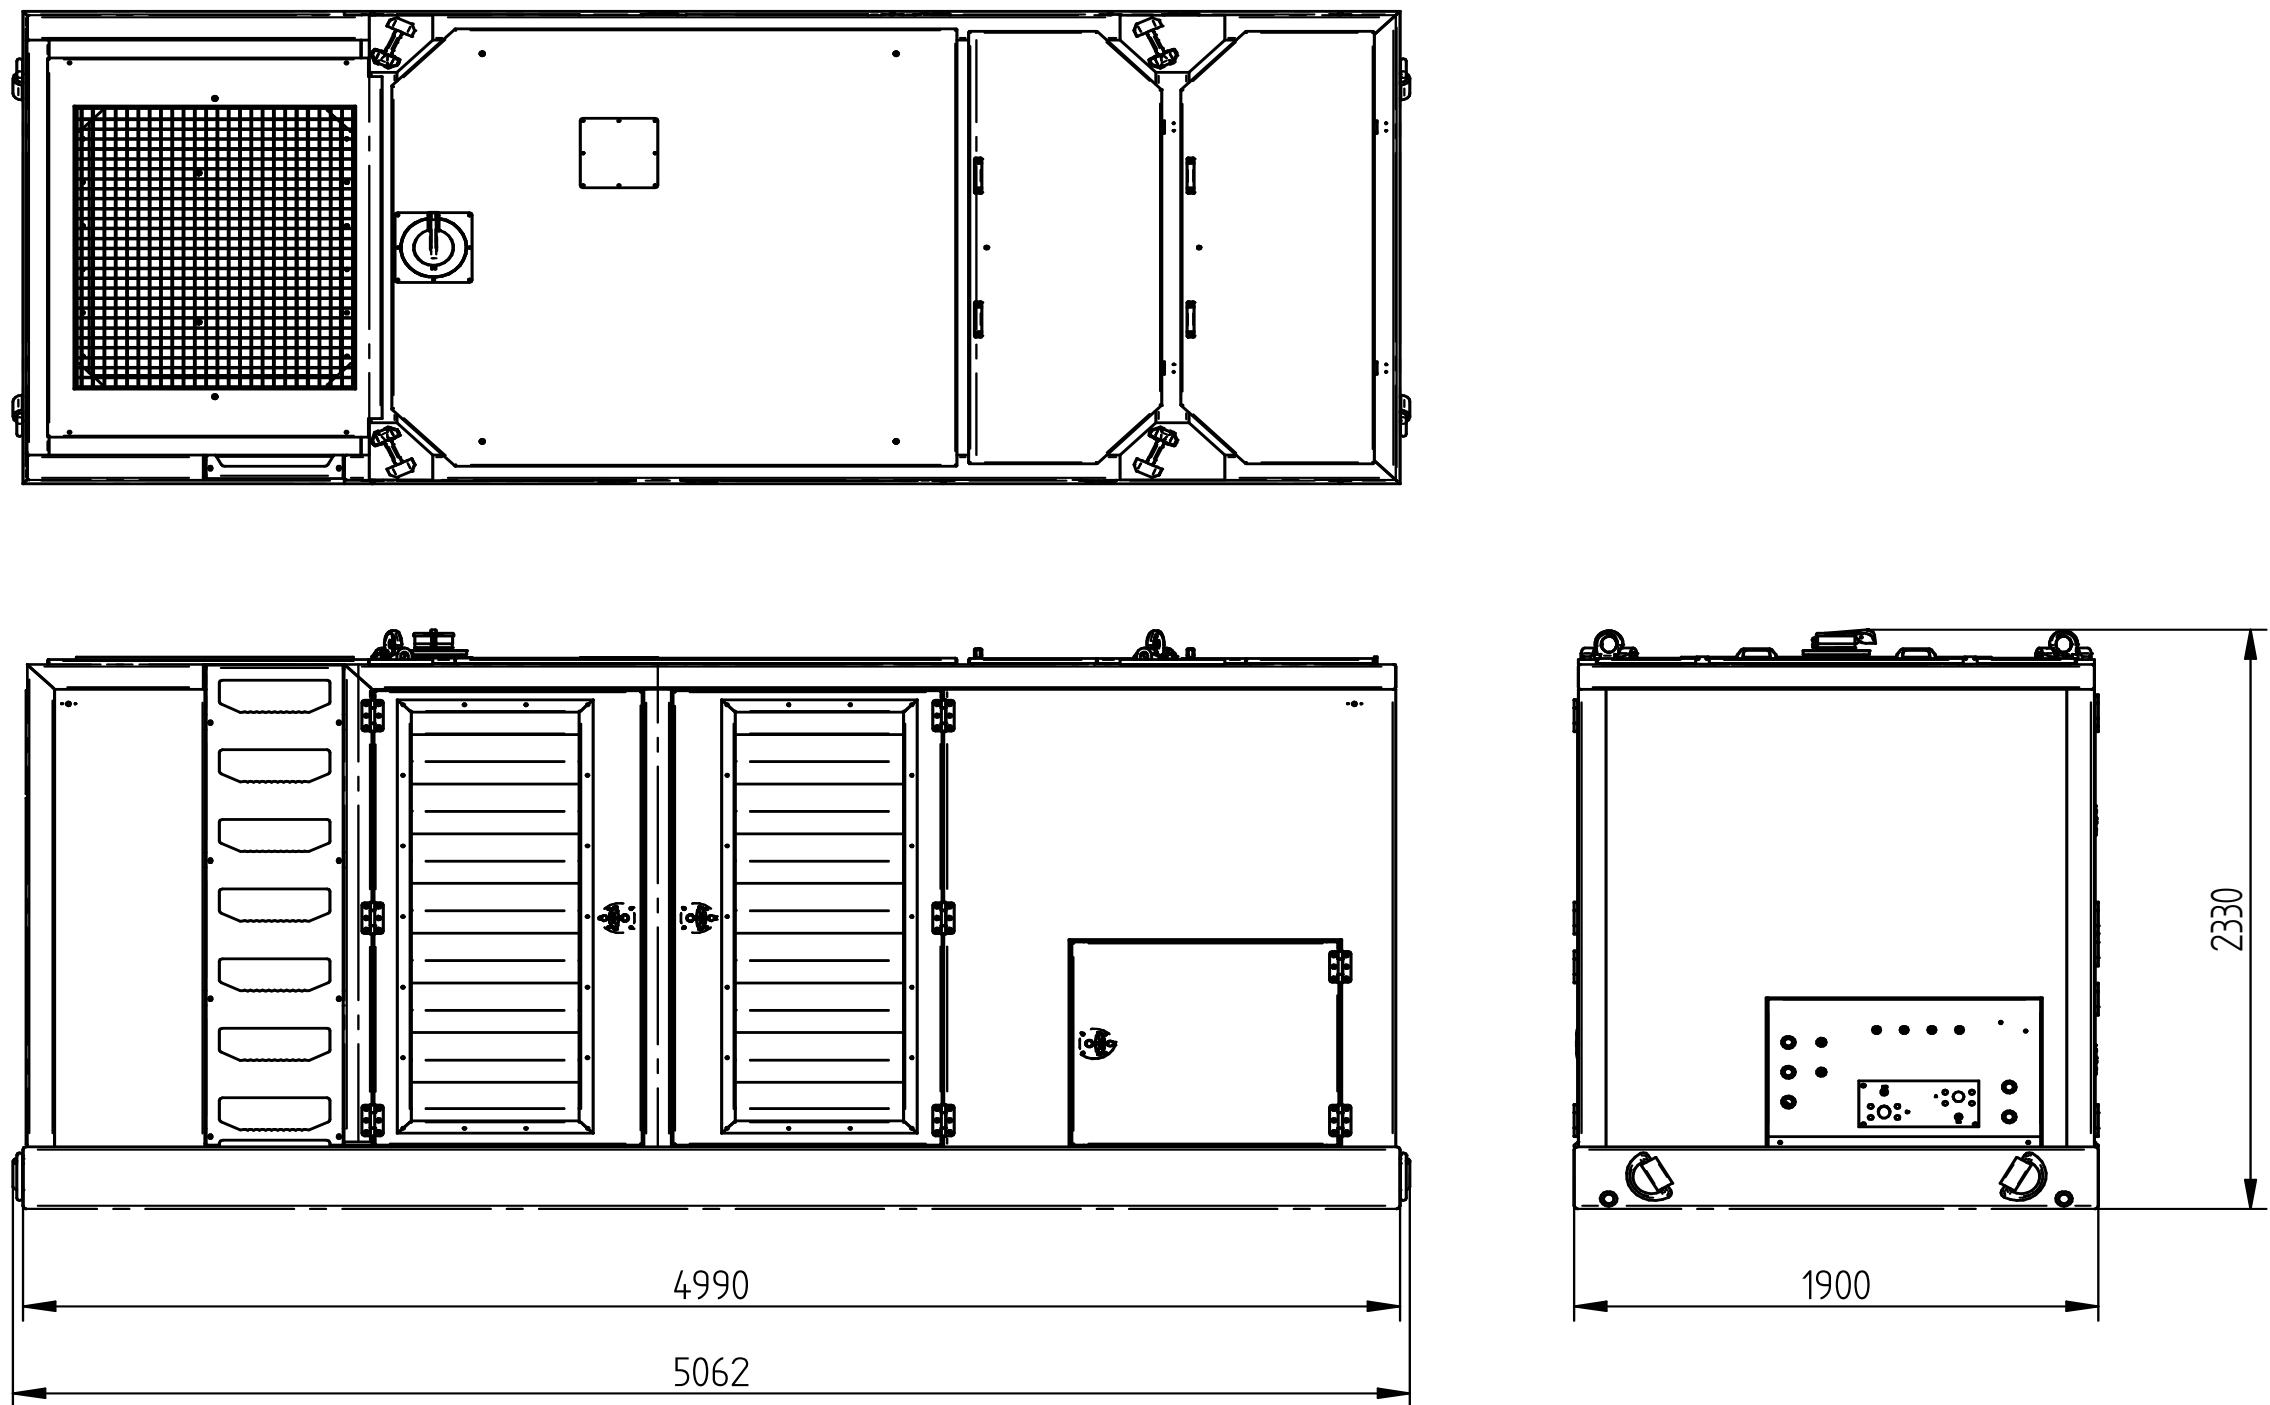

Specifications :		PVE 800 STAGE V / TIER 4F	
Diesel Engine	Volvo TWD 1683 VE		
Max. theoretical power	585/796		kW/HP
Max. frequency	1900		rpm
Max. operating pressure	350		bar
Hydraulic pump	Parker		
Max. oil flow	810		L/min
Diesel oil	1045		L
DEF (AdBlue) capacity	70		L
Hydraulic oil	2200		L
Weight without fuel	8720		kg
Weight filled up	9600		kg






Technische Daten

PVE 800 STAGE V / TIER 4F

Aggregat

Deutsch

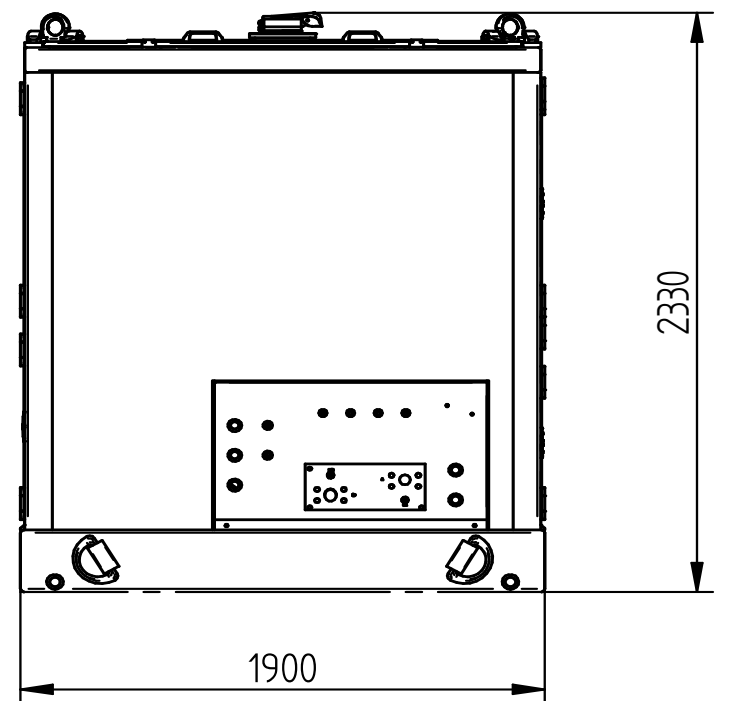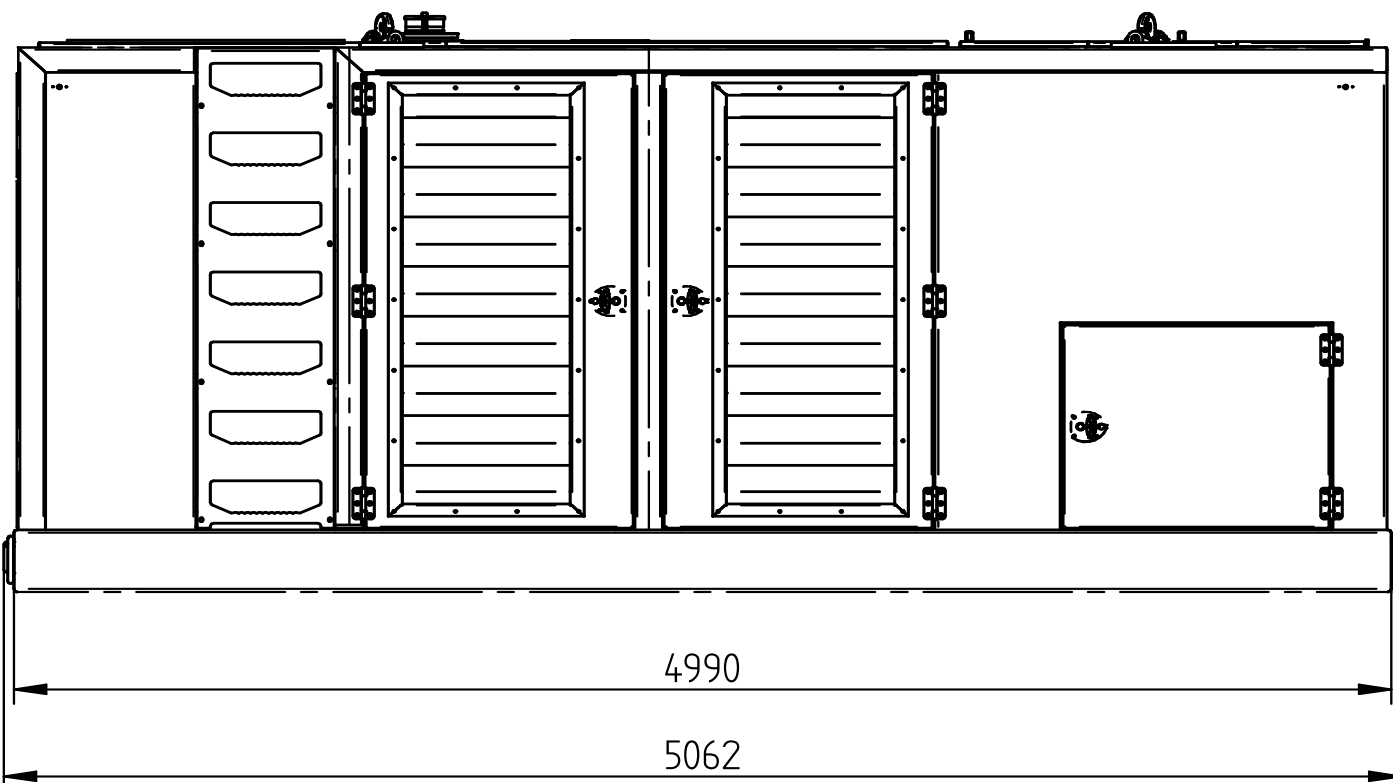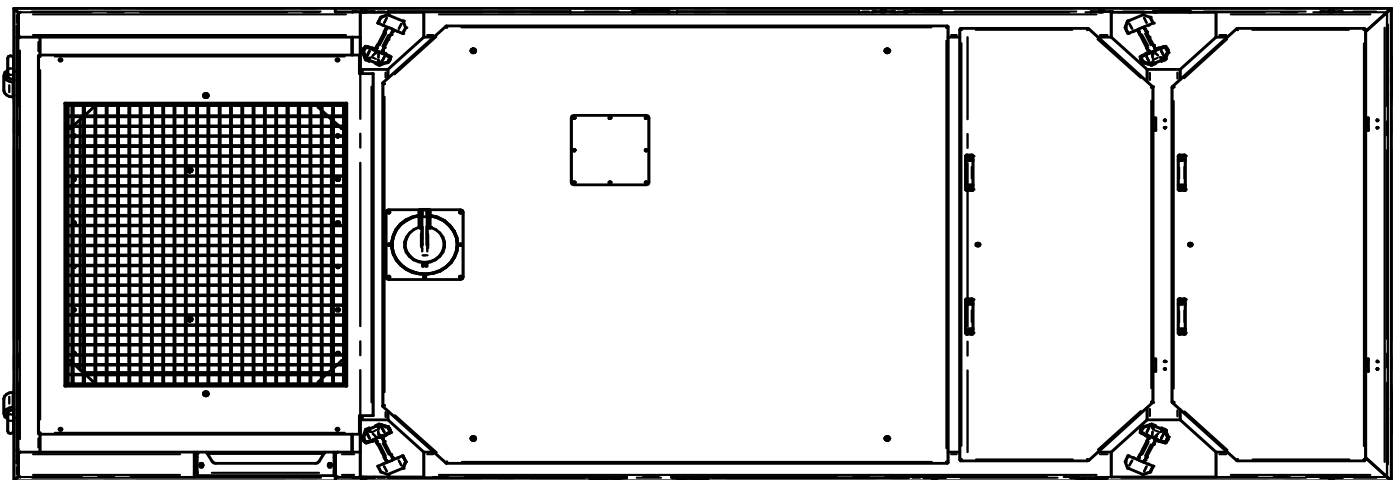

Technische Daten :

PVE 800 STAGE V / TIER 4F




Dieselmotor	Volvo TWD 1683 VE	
Max. theoretische Leistung	585/796	kW/HP
Max. Drehzahl	1900	rpm
Max. Betriebsdruck	350	bar
Hydraulische Pumpe	Parker	
Max. Fördermenge	810	L/min
Diesel Öl	1045	L
DAF (AdBlue) kapazität	70	L
Hydraulische Öl	2200	L
Gewicht ohne Diesel Öl	8720	kg
Gewicht	9600	kg



Spécifications

PVE 800 STAGE V / TIER 4F

Groupe hydraulique

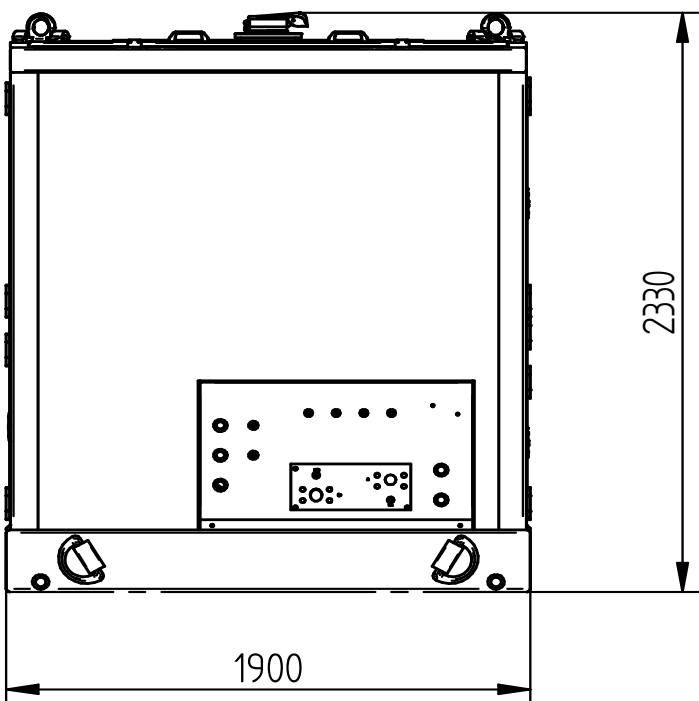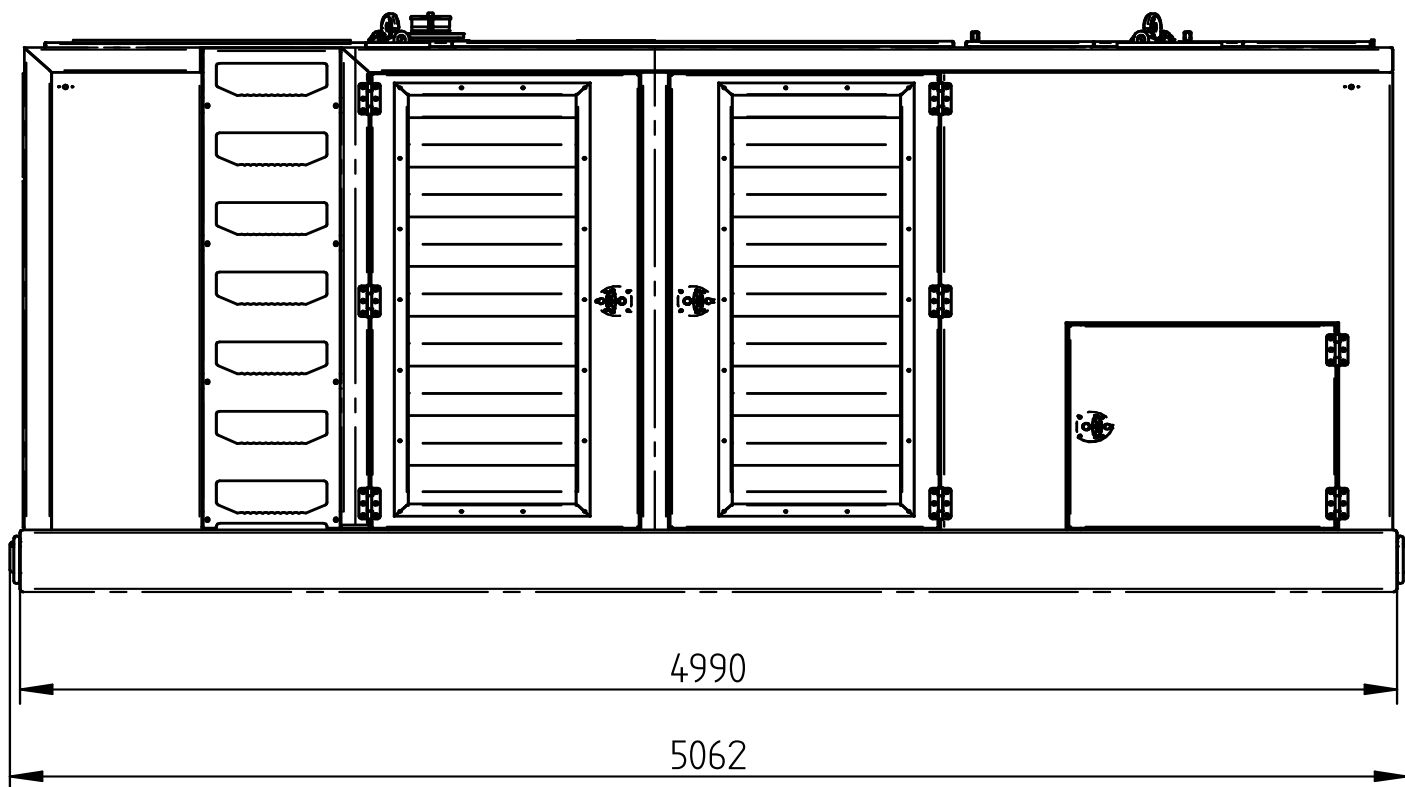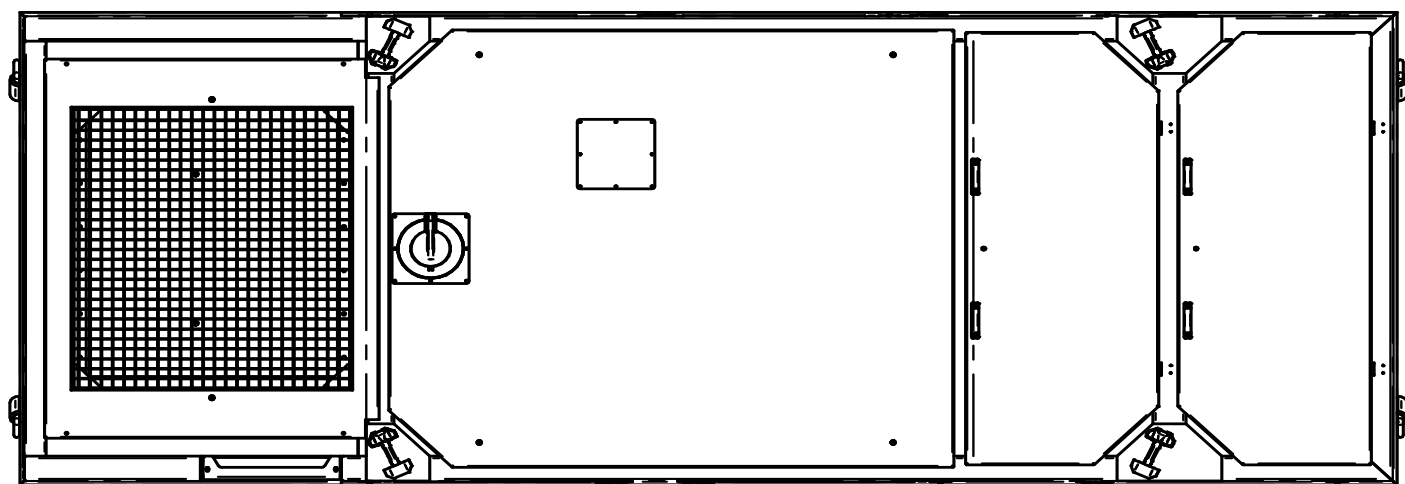


Spécifications		PVE 800 STAGE V / TIER 4F	
Moteur Diesel	Volvo TWD 1683 VE		
Puissance théorique max.	585/796	kW/HP	
Max. fréquence	1900	rpm	
Pression de travail max.	350	bar	
Pompe hydraulique	Parker		
Débit d'huile max.	810	L/min	
Huile diesel	1045	L	
Capacité FED (AdBlue)	70	L	
Huile hydraulique	2200	L	
Poids sans huile diesel	8720	kg	
Poids	9600	kg	

Specificaties

PVE 800 STAGE V / TIER 4F

Hydraulisch aggregaat

Nederlands

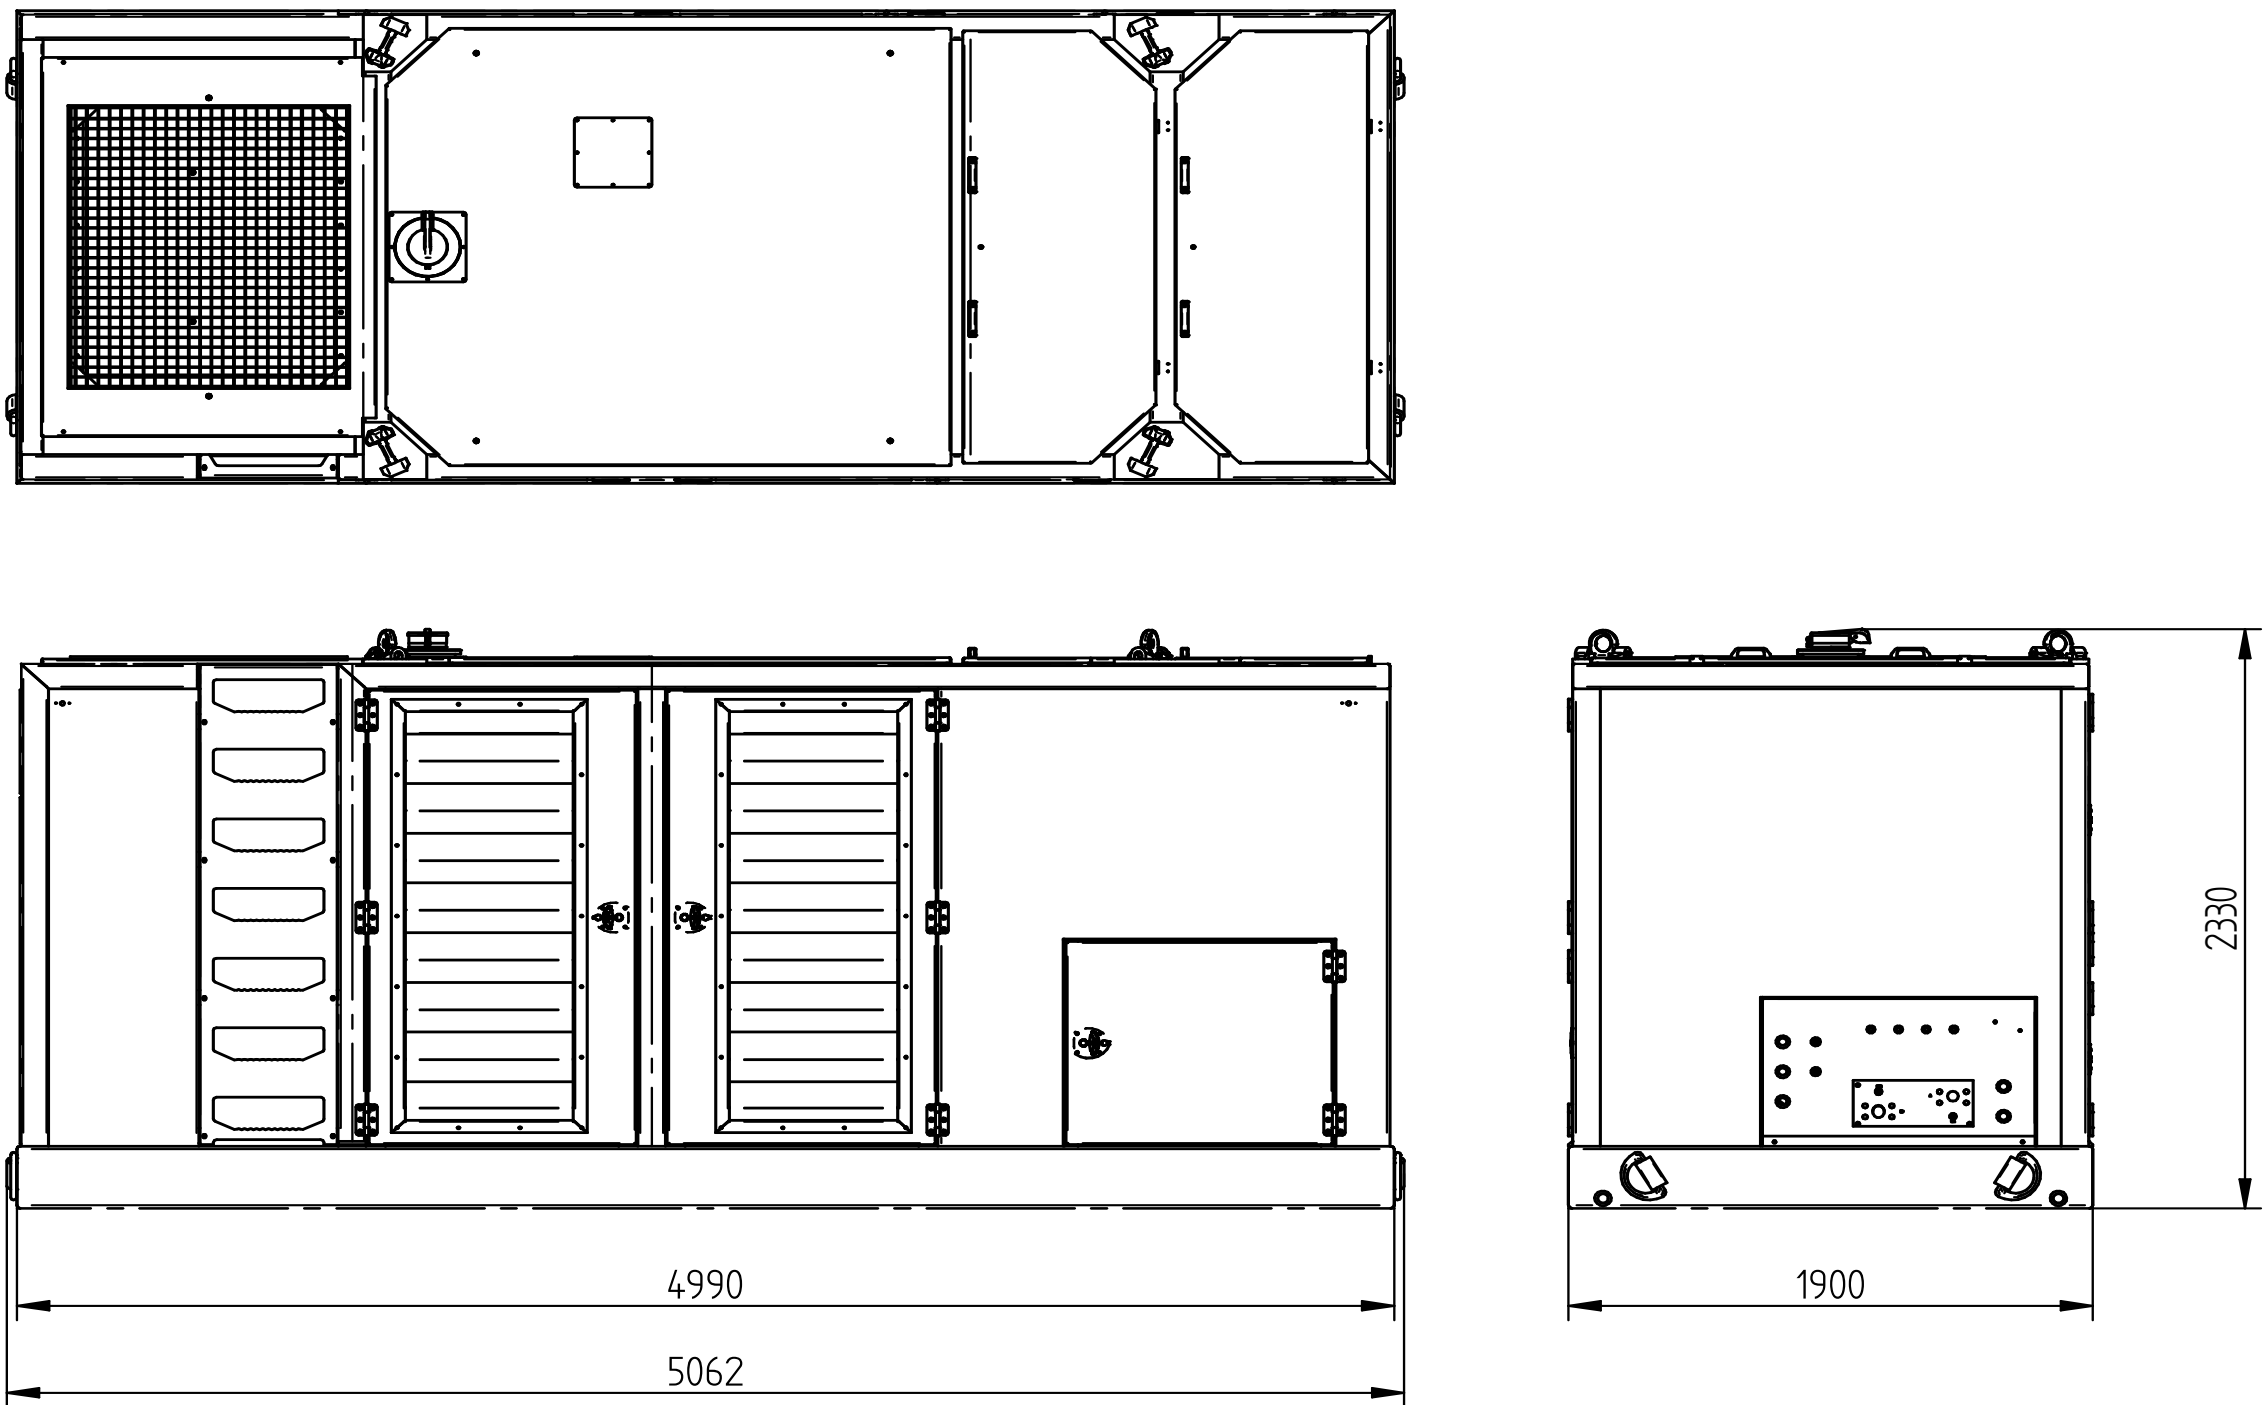


Specificaties			PVE 800 STAGE V / TIER 4F		
Dieselmotor			Volvo TWD 1683 VE		
Max. theoretisch vermogen			585/796		kW/HP
Max. toerental			1900		rpm
Max. werkdruk			350		bar
Hydraulische pomp			Parker		
Max. olie doorstroming			810		L/min
Diesel olie			1045		L
DEF (AdBlue) capaciteit			70		L
Hydraulische olie			2200		L
Gewicht zonder diesel			8720		kg
Gewicht			9600		kg

Especificaciones

PVE 800 STAGE V / TIER 4F

Unidat de potencia

Español

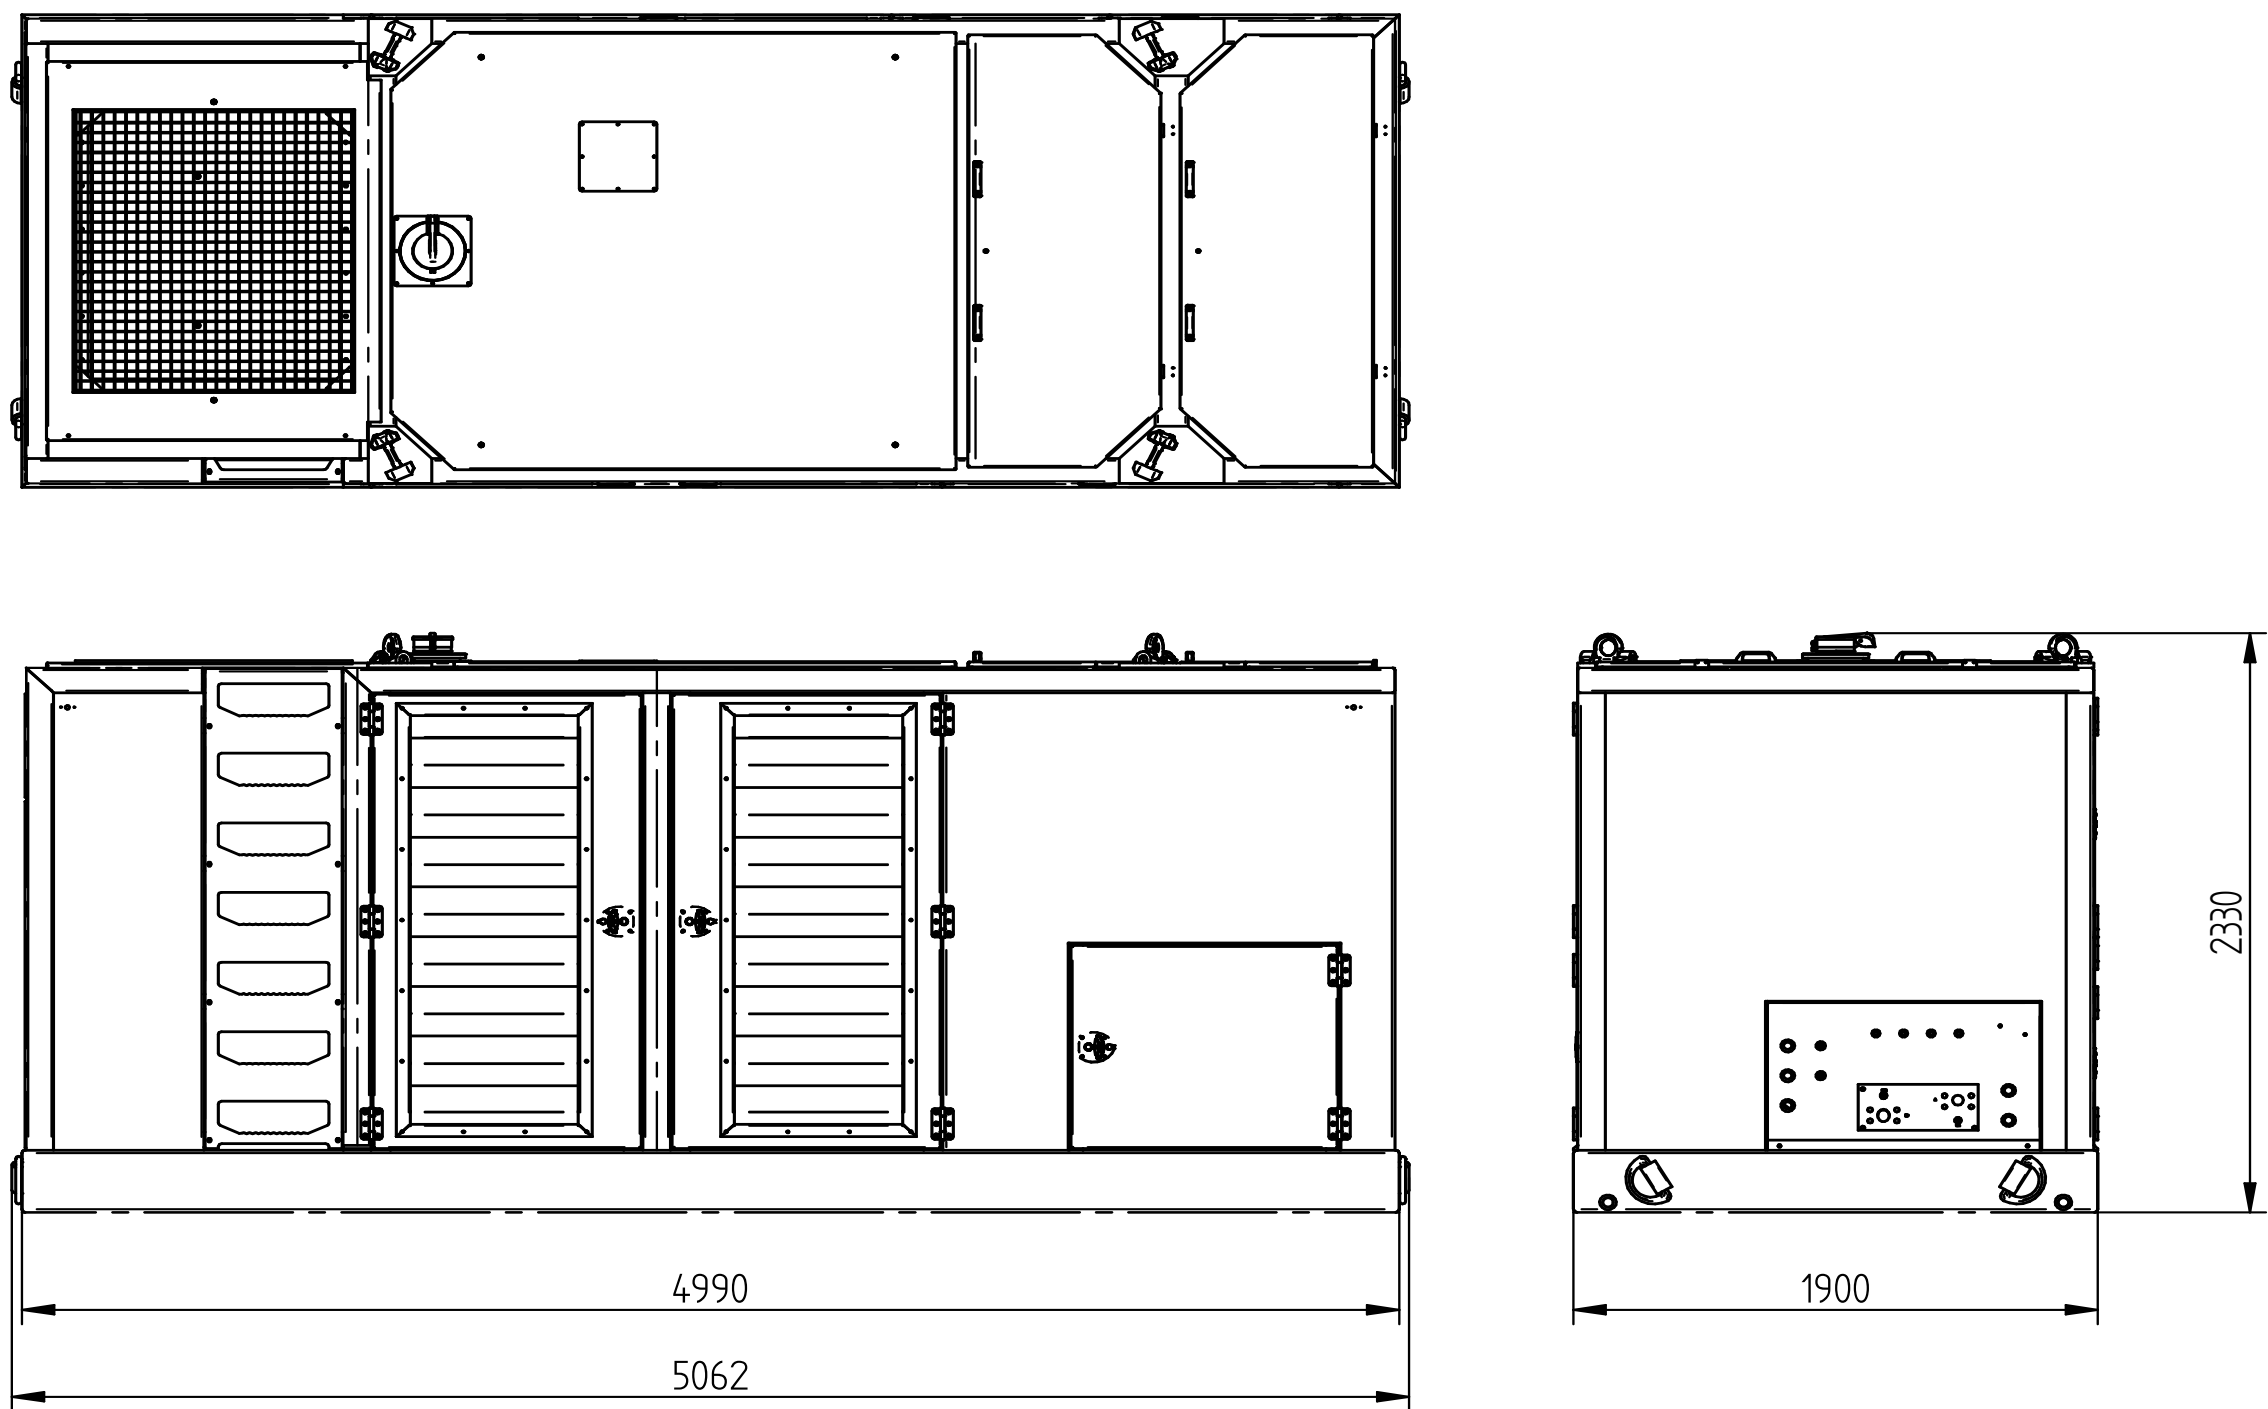




Especificaciones		PVE 800 STAGE V / TIER 4F	
Motor de diesel	Volvo TWD 1683 VE		
Potencia Máxima teórica	585/796		kW/HP
Frecuencia máxima	1900		rpm
Presión máxima de trabajo	350		bar
Bomba hidráulica	Parker		
Flujo de aceite máximo	810		L/min
Gasóleo	1045		L
Capacidad DEF (AdBlue)	70		L
El aceite hidráulico	2200		L
Peso sin gasóleo	8720		kg
Peso	9600		kg



Specifications
PVE 800 STAGE V / TIER 4F
 Hydraulic Power Pack

USA

Dimensions in inches

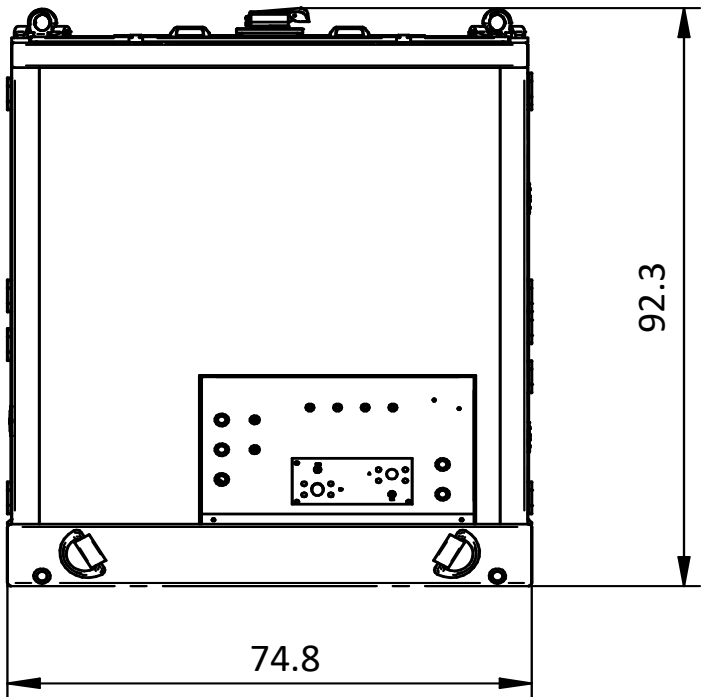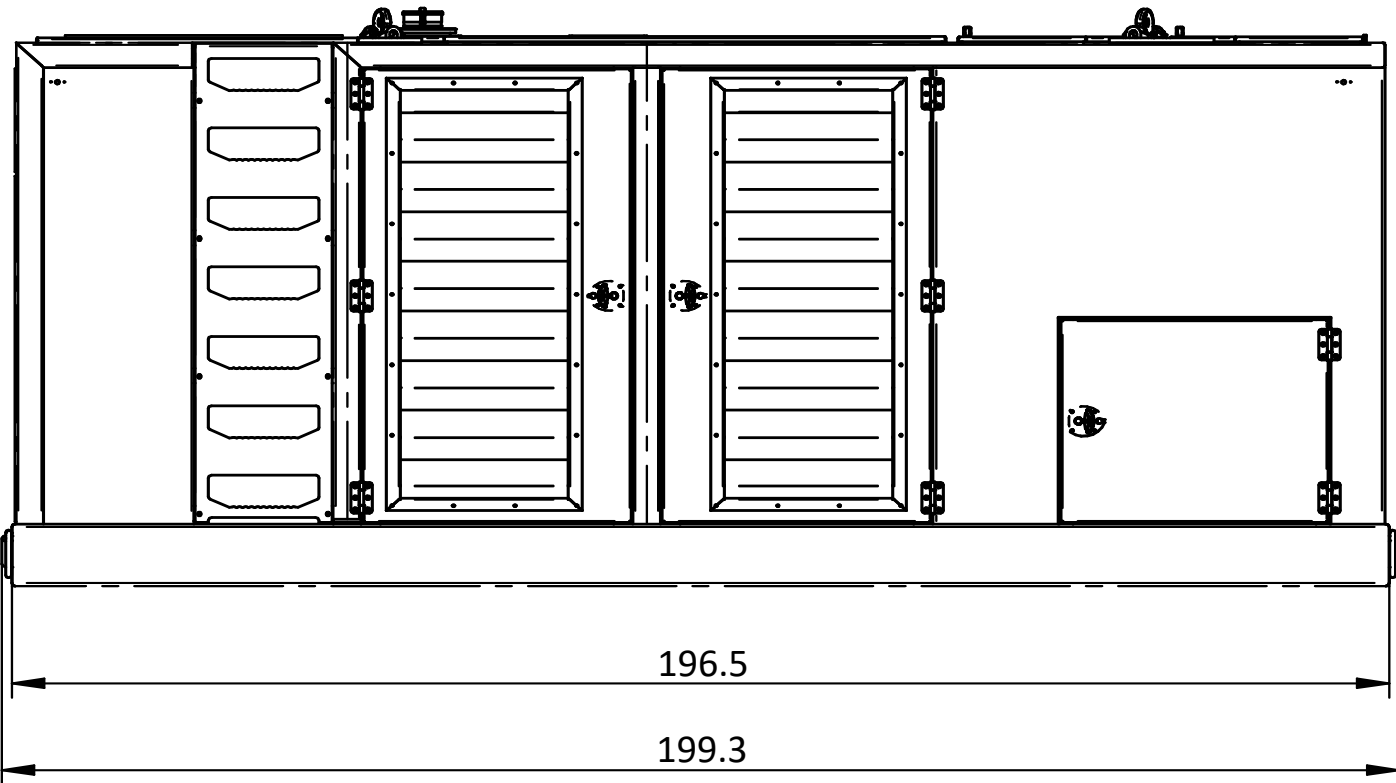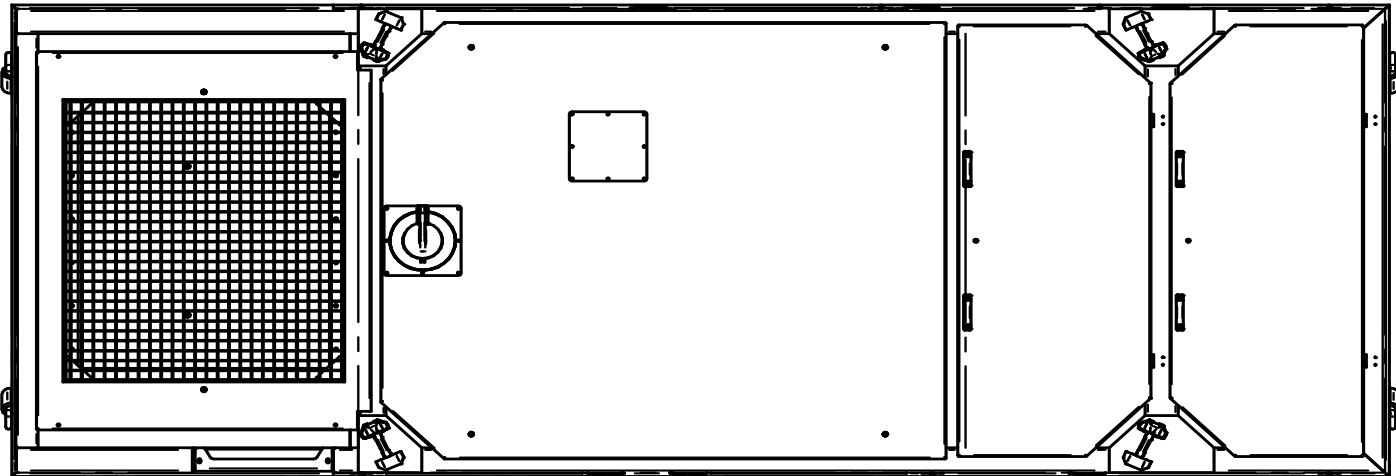

Specifications

PVE 800 STAGE V / TIER 4F




Diesel Engine	Volvo TWD 1683 VE	
Max. theoretical power	585/796	kW/HP
Max. frequency	1,900	rpm
Max. operating pressure	5,076	psi
Hydraulic pump	Parker	
Max. oil flow	214	gal/min
Diesel Fuel	276	gal
DEF (AdBlue) capacity	18	gal
Hydraulic oil	581	gal
Weight without fuel	19,224	lbs
Weight with fuel	21,164	lbs



Specificatii

PVE 800 STAGE V / TIER 4F

unitate de putere hidraulica

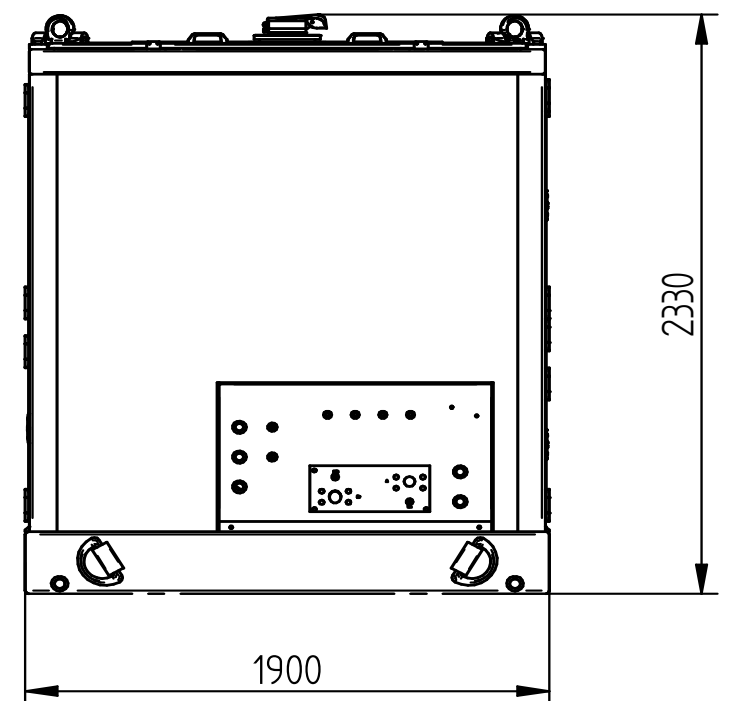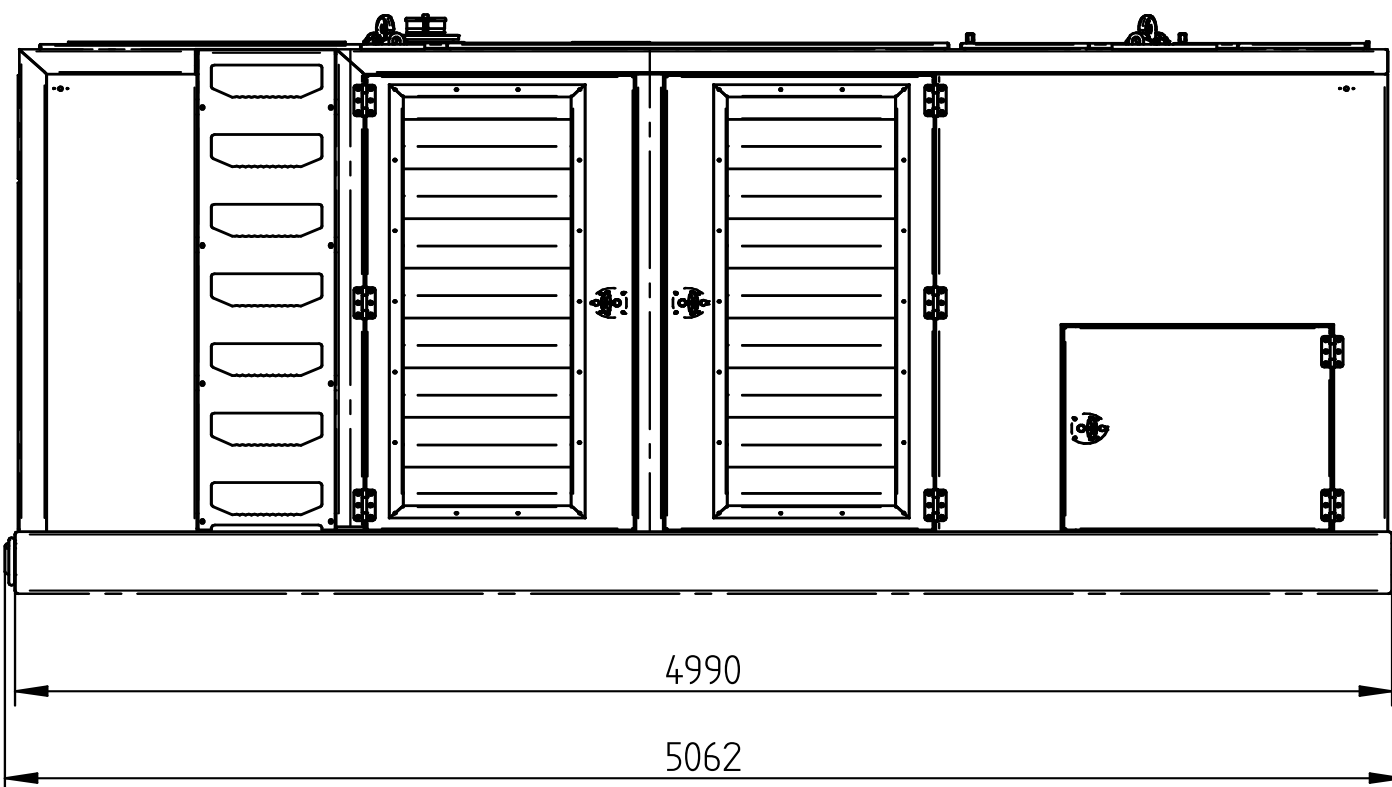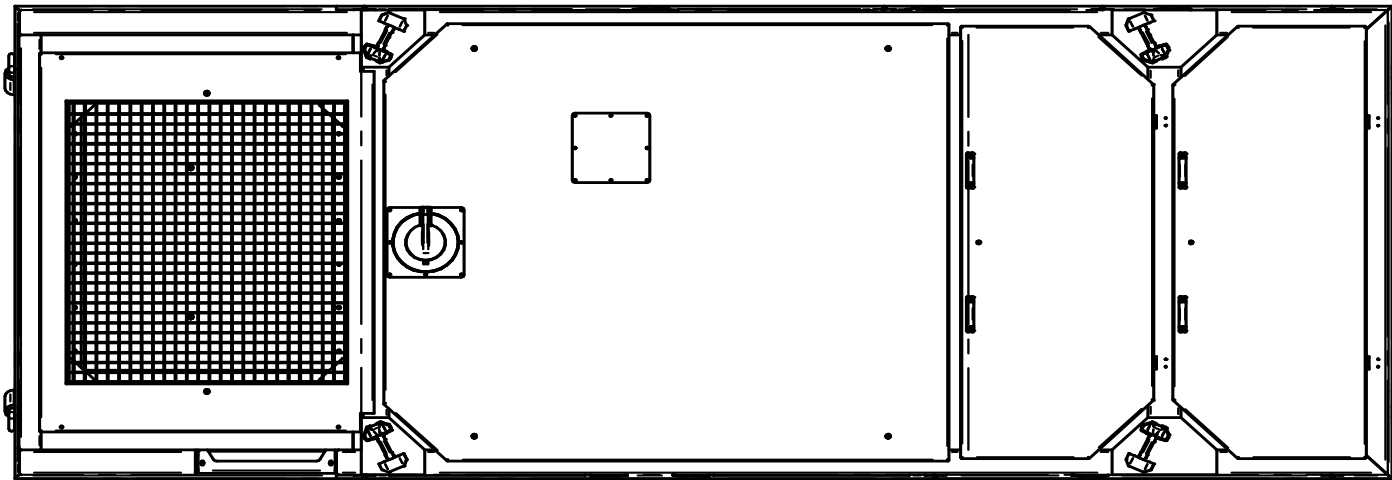

Specificatii :

PVE 800 STAGE V / TIER 4F

Motor diesel	Volvo TWD 1683 VE	
Puterea maxima teoretica	585/796	kW/HP
Frecventa maxima	1900	rpm
Presiune maxima de lucru	350	bar
Pompa hidraulica	Parker	
Debit maxim de ulei	810	L/min
motorină	1045	L
Capacitate rezervor aditiv AdBlue	70	L
Ulei hidraulic	2200	L
Greutatea fara combustibil	8720	kg
Greutatea cu combustibil	9600	kg