



WOLTMAN 35 DR

WOLTMAN PILING & DRILLING RIGS

High capacity **Designed**
for multiple jobs per day
Low weight, wide tracks


DIESEKO GROUP

W **WOLTMAN**
PILING & DRILLING RIGS

WOLTMAN 35 DR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

TECHNICAL SPECIFICATIONS

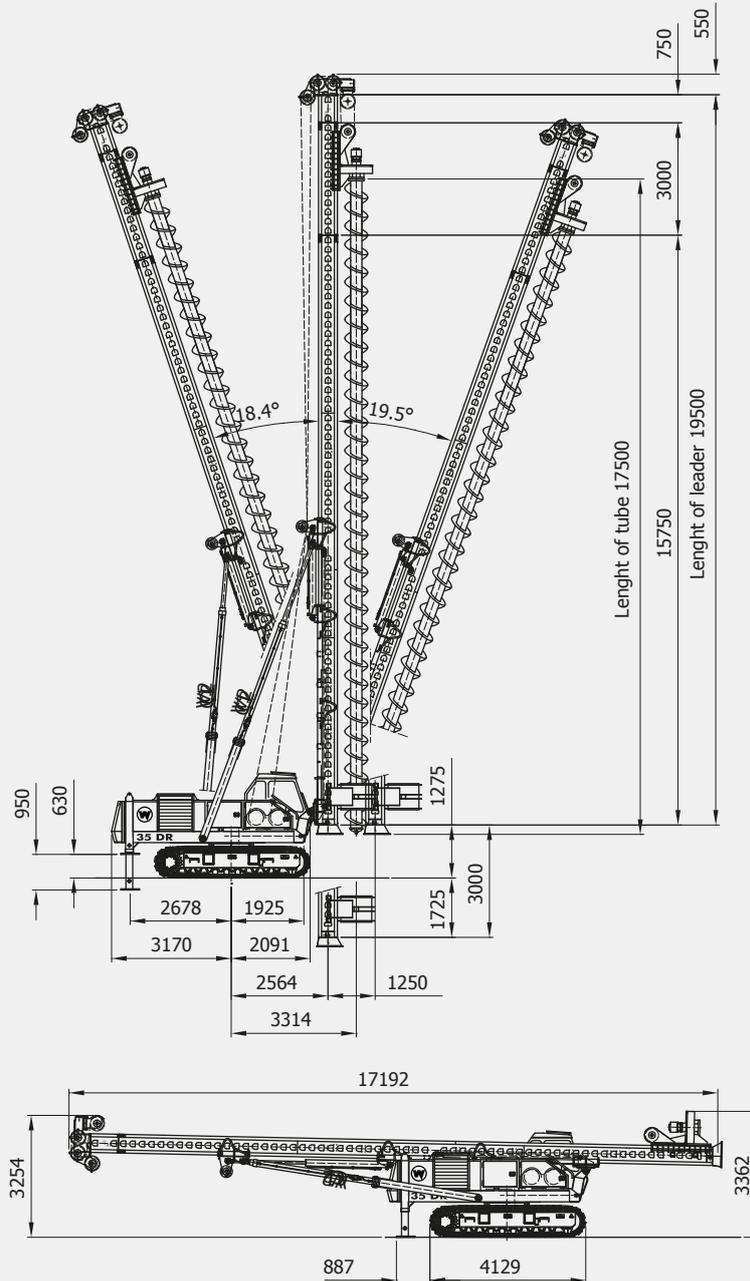

All dimensions are in millimeters

Operational specifications

Recommended Rotary head	PVE	RH-8	
Max. torque on leader	kNm	80	ton/m 9.0
Leader length std. (max.)	mtr	17,5 (19,5)	ft 57.4 (64.0)
Max. drill depth	mtr	15 (17)	ft 49.2 (55.8)
Max. diameter	mm	600	inch 24
Pull up force	ton	30	lbs 66,139
Pull down force	ton	6	lbs 13,228
Operational weight RH-8	ton	33	lbs 72,752
Max. oil flow	ltr/min	260	g/min 69
Max. pressure	bar	320	psi 4,641

Weights

Transport weight excl. rotary head	ton	30	lbs 66,139
Transport weight w/o counterweight	ton	27	lbs 59,525
Transport weight incl. RH-8	ton	33	lbs 72,752
Total counterweight	ton	3	lbs 6,614

Rig specifications

Engine	Caterpillar C-7.1		
Engine output	kW	183	HP 250
Hydraulics	Bosch Rexroth		
Hydraulic system	Openloop		

* subject to capacity charts

Woltman Piling and Drilling Rigs B.V. Ambachtsweg 16, 3381 LN Giessenburg, the Netherlands
T: +31 (0)184 - 652 044 W: www.woltmanrigs.com E: info@woltmanrigs.com

Member of
DIESEKO GROUP