


High capacity, Very quick to assemble Fast and efficient, Very reliable, CAT engine,



## WOLTMAN 50 PR

Woltman is continuously improving their range of equipment. Developments in relation to emission standards and fuel efficiency might result in different specifications. No rights can be attached to the dimensions and specifications mentioned on this leaflet because they might have changed without further notification. All data is subject printing and conversion errors.

## **TECHNICAL SPECIFICATIONS**

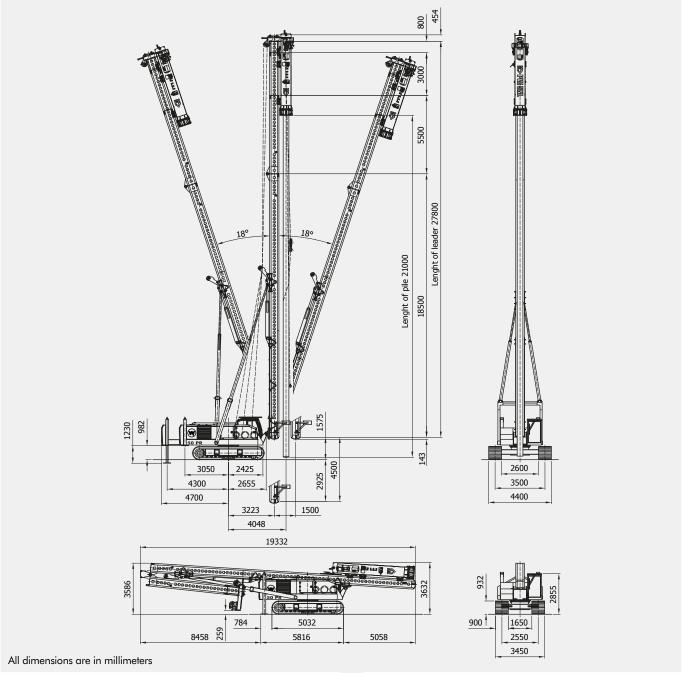

Operational specifications					Weights				
Recommended hammer size	PVE	5NL / 6NL	/ 7NL		Transport weight excl. hammer	ton	52	lbs	114,640
Max. pile + hammer weight*	ton	18,5	lbs	40,785	Transport weight w/o counterweight	ton	45,1	lbs	99,428
Leader length std. (max.)	mtr	24,8 (27,8)	ft	81.4 (91.2)	Transport weight incl. PVE 5NL	ton	61	lbs	134,482
Max. pile length (max.)	mtr	18 (21)	ft	59.1 (68.9)					
Hammer winch	ton	12 (6x2)	lbs	26,455	Rig specifications				
Pile winch	ton	12 (6x2)	lbs	26,455	Engine	Caterpillar C-7.1			
Operational weight incl. 5NL	ton	61	lbs	134,482	Engine output	kW	183	HP	250
Max. oil flow	l/min	390	g/min	103	Hydraulics	Bosch Rexroth			
Max. pressure	bar	320	psi	4,641	Hydraulic system	Openlo	ор		

<sup>\*</sup> subject to capacity charts

DIESEKO GROUP

WM2020-1-50PR