

## **BENEFITS**

DESIGNED FOR 14 TO 22 TONS CARRIERS

> HEAVY LOAD AND STRONG GRIP

LOADING, DISMANTLING, CLEANING AND SORTING, DEMOLITION

- **Standard 360° continuous rotation:** full maneuverability to reach optimal and accurate positioning on all jobsites.
- **Secured equipment:** operations are kept safe with overload protection, ending position limiter and dampener.
- **Built to last:** every component in contact with the material is made of reinforced steel: structure and shells of 400HB steel, and blades of 500HB steel.
- **Easy maintenance:** reversible (twice) and field-replaceable lower blades for longer cycles and extended wear resistance..

## DEMOLITION & SORTING GRAPPLE MULTIPURPOSE GRIP


ATTACHMENT SPECS		
WEIGHT - WITHOUT ADAPTER PLATE (KG - LB)	1,170	2,579
LOAD CAPACITY (M3 - FT3)	0.6	21.2
CLOSING FORCE (T)	5.1	

HYDRAULIC SPECS		
OIL FLOW (MAX, L/MIN – GPM)	80	21.1
OPENING & CLOSING PRESSURE (MAX, BAR - PSI)	350	5,075
ROTATION FLOW (MAX, L/MIN - GPM)	25	6.6
ROTATION PRESSURE (MAX, BAR - PSI)	90	1,305

CARRIER SPECS	
WEIGHT (MIN - MAX, T)	14 - 22

DIMENSIONS (MM - IN)		
A	1,793	70.6
В	1,050	41.3
C	1,322	52
D	1,482	58.3
E	1,279	50.3
F	707	27.8

CONSUMABLES	PRODUCT NUMBER
SPARE BLADES	contact us
BASIC MAINTENANCE KIT	contact us
ADVANCED MAINTENANCE KIT	contact us

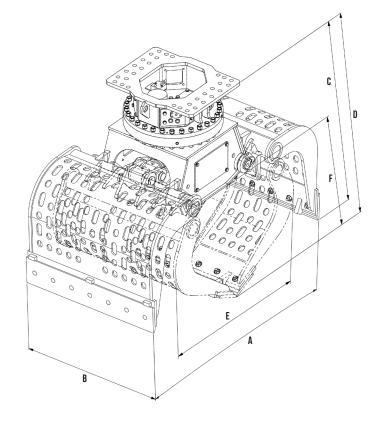



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2024 Montabert. All rights reserved.



HCG20-600 EN.A4.01.2024