

BENEFITS

DESIGNED FOR 27 TO 45 TONS CARRIERS

ALL KIND OF MATERIALS HANDLING

DISMANTLING, WASTE DISPOSAL, STONE SETTING, LANDSCAPING

- **Standard 360° continuous rotation:** full maneuverability to reach optimal and accurate positioning on all jobsites.
- **Secured equipment:** operations are kept safe with overload protection, ending position limiter and dampener.
- **Built to last:** every component in contact with the material is made of reinforced steel: structure and shells of 400HB steel, and blades of 500HB steel.
- **Easy maintenance:** reversible (twice) and field-replaceable lower blades for longer cycles and extended wear resistance..



SWISS KNIFE OF MATERIAL HANDLING


ATTACHMENT SPECS		
WEIGHT - WITHOUT ADAPTER PLATE (KG - LB)	1,950	4,299
LOAD CAPACITY (M³ - FT³)	0.9	31.7
CLOSING FORCE (T)	6.7	

HYDRAULIC SPECS		
OIL FLOW (MAX, L/MIN – GPM)	120	31.7
OPENING & CLOSING PRESSURE (MAX, BAR - PSI)	350	5,075
ROTATION FLOW (MAX, L/MIN - GPM)	45	11.9
ROTATION PRESSURE (MAX, BAR - PSI)	90	1,305

CARRIER SPECS	
WEIGHT (MIN - MAX, T)	27 - 45

DIMENSIONS (MM - IN)		
A	2,397	94.3
В	946	37.2
C	1,569	61.7
D	1,847	72.7
E	1,615	63.5
F	1,003	39.4

CONSUMABLES	PRODUCT NUMBER
SPARE BLADES	contact us
BASIC MAINTENANCE KIT	contact us
ADVANCED MAINTENANCE KIT	contact us

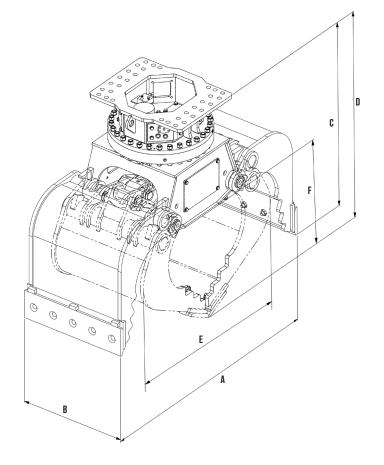



The content of this brochure constitutes non-binding information and may be changed at any time without notice. Montabert gives, and the brochure contains, no warranties whatsoever, express or implied. All the contents, including but not limited to text, images, graphics are all subject to copyright and all intellectual property protection. Their use or misuse is strictly prohibited. Montabert brand and logo used herein are the property of Montabert. Nothing contained on this document shall be construed as constituting any commitment by Montabert or as granting any license or right to use any intellectual property. ©2024 Montabert. All rights reserved.